



3-WAYS MEDIUM PRESSURE MANUAL DIVERTER VALVES

SPECIFICATIONS


Fluid viscosity:	15-250mm ² /s
Filtration:	ISO 4406
Fluid temperature:	-20°C + 80°C
Ambient temperature:	-20°C + 50°C



DIMENSIONS (mm)

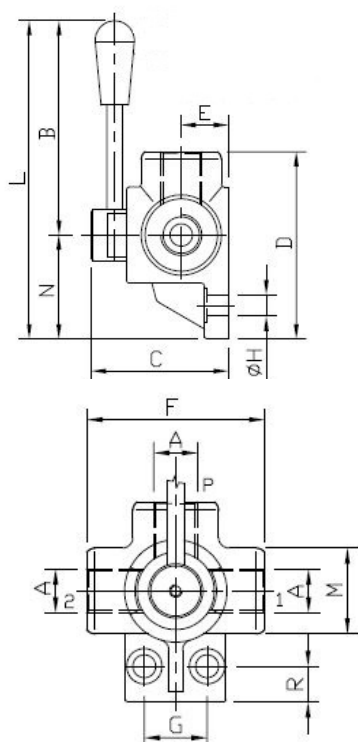

PERFORMANCE

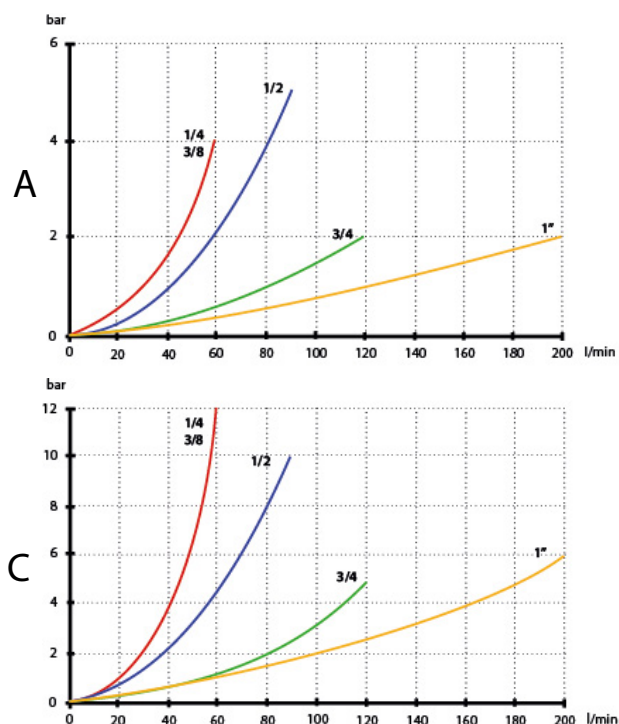

Standard code	Thread	Func	B	C	D	E	F	G	H	L	M	N	R	Q max (l/min)	Max Pres	kg
DDF3140-A	1/4	A/C	128	62	78.5	21	73	24	8.5	169	35	42	11	40	315	0.95
DDF3380-A	3/8	A/C	128	62	78.5	21	73	24	8.5	169	35	42	11	60	315	0.89
DDF3120-A	1/2	A/C	128	70	96	25	85	30	11	182	42	53	17	90	280	1.45
DDF3340-A	3/4	A/C	125	80	100	28	91	32	11	180	47	54	13	120	250	1.82
DDF3100-A	1"	A/C	140	90	113	32.5	98	32	11	207	56	64	14	200	220	2.50