
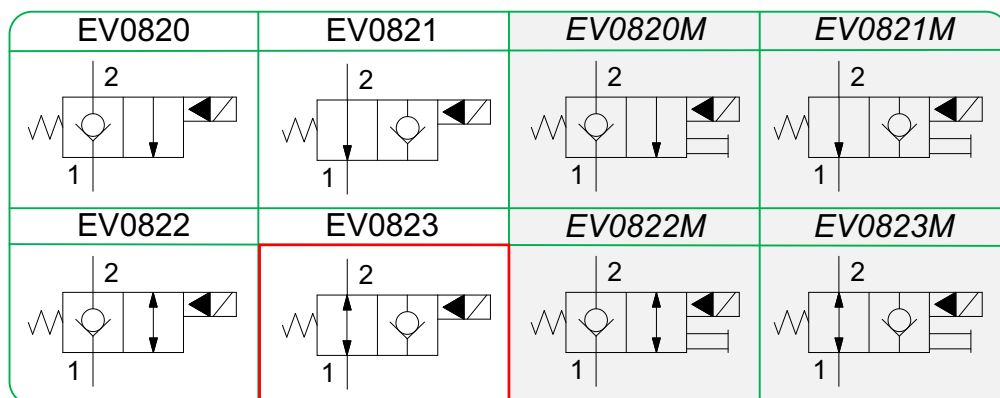



Valvola elettrica direzionale 2/2
2/2, solenoid directional valve
mod. **EV-08-2X**

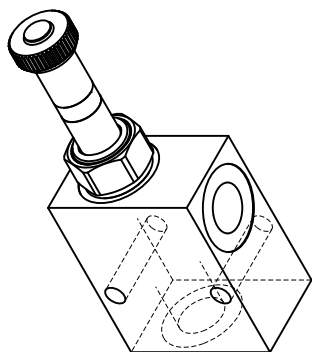


Portata massima Maximum flow	40 l/min 10.6 gpm
Pressione massima Maximum pressure bar/psi	Corpo in alluminio Aluminium body Corpo in acciaio Steel body 280/4060 350/5075

Modello Type	② ①	H	H1	H2	H3
EV0820-14	G1/4	50	59	13.5	26.5
EV0820-38	G3/8	60	59	15	36.5
EV0820-12	G1/2	60	59	15	36.5
EV0821-14	G1/4	50	64	13.5	26.5
EV0821-38	G3/8	60	64	15	36.5
EV0821-12	G1/2	60	64	15	36.5
EV0822-14	G1/4	50	59	13.5	26.5
EV0822-38	G3/8	60	59	15	36.5
EV0822-12	G1/2	60	59	15	36.5
EV0823-14	G1/4	50	64	13.5	26.5
EV0823-38	G3/8	60	64	15	36.5
EV0823-12	G1/2	60	64	15	36.5
EV0820M-14	G1/4	50	81	13.5	26.5
EV0820M-38	G3/8	60	81	15	36.5
EV0820M-12	G1/2	60	81	15	36.5
EV0821M-14	G1/4	50	84	13.5	26.5
EV0821M-38	G3/8	60	84	15	36.5
EV0821M-12	G1/2	60	84	15	36.5
EV0822M-14	G1/4	50	81	13.5	26.5
EV0822M-38	G3/8	60	81	15	36.5
EV0822M-12	G1/2	60	81	15	36.5
EV0823M-14	G1/4	50	84	13.5	26.5
EV0823M-38	G3/8	60	84	15	36.5
EV0823M-12	G1/2	60	84	15	36.5

su richiesta – upon request


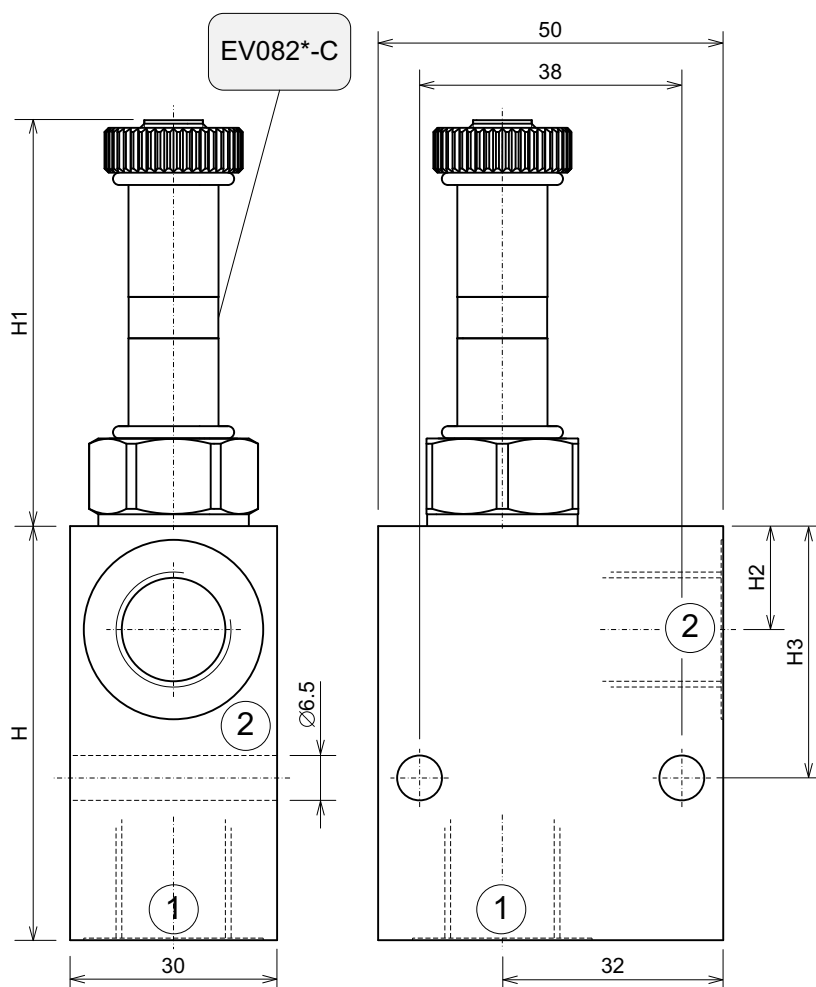


Sigla di ordinazione – Ordering code

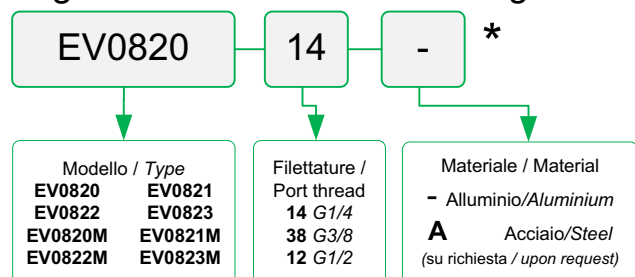

* Bobina venduta separatamente
Coil sold separately


Valvola elettrica direzionale 2/2
2/2, solenoid directional valve
mod. **EV-10-2X**

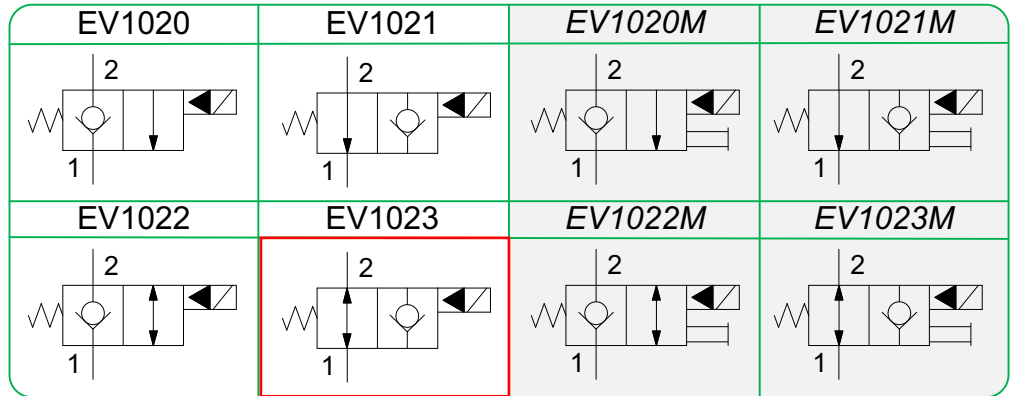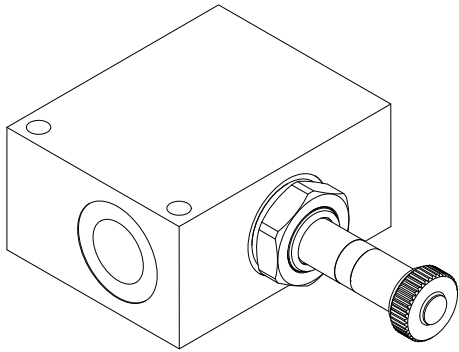


Portata massima Maximum flow	70 l/min 18 gpm
Pressione massima Maximum pressure bar/psi	Corpo in alluminio Aluminium body Corpo in acciaio Steel body 280/4060 350/5075

Modello Type	② ①	H1	H2
EV1020-12	G1/2	56	23.5
EV1020-34	G3/4	56	25
EV1021-12	G1/2	61	23.5
EV1021-34	G3/4	61	25
EV1022-12	G1/2	56	23.5
EV1022-34	G3/4	56	25
EV1023-12	G1/2	61	23.5
EV1023-34	G3/4	61	25
EV1020M-12	G1/2	78	23.5
EV1020M-34	G3/4	78	25
EV1021M-12	G1/2	81	23.5
EV1021M-34	G3/4	81	25
EV1022M-12	G1/2	78	23.5
EV1022M-34	G3/4	78	25
EV1023M-12	G1/2	81	23.5
EV1023M-34	G3/4	81	25

su richiesta – upon request


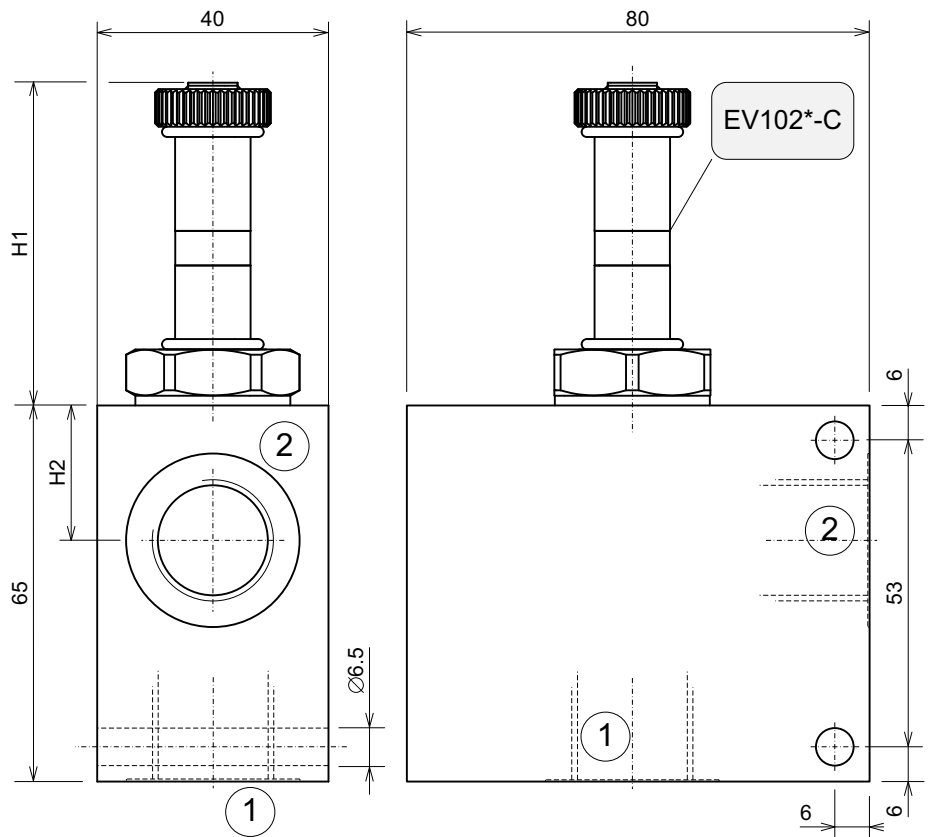


Sigla di ordinazione – Ordering code

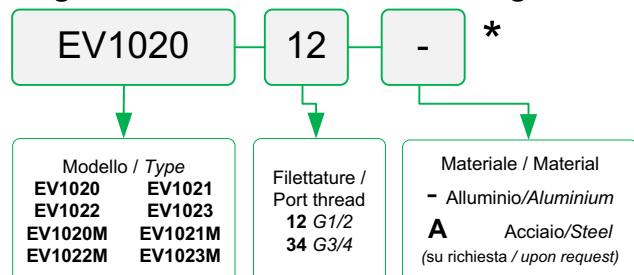


* Bobina venduta separatamente
Coil sold separately

Valvola elettrica direzionale 2/2
2/2, solenoid directional valve
mod. **EV-16-2X**

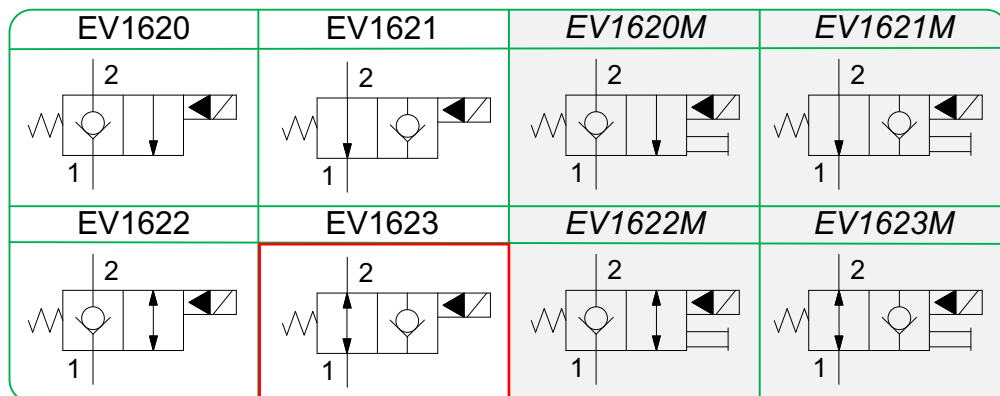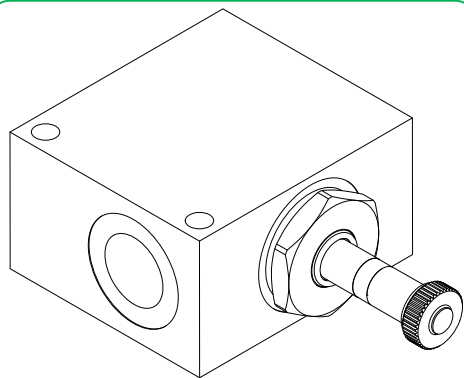


Portata massima Maximum flow	150 l/min 40 gpm
Pressione massima Maximum pressure bar/psi	Corpo in alluminio Aluminium body 250/3625 Corpo in acciaio Steel body 300/4350

Modello Type	② ①	H1	H2
EV1620-34	G3/4	56	28
EV1620-10	G1	56	31
EV1621-34	G3/4	61	28
EV1621-10	G1	61	31
EV1622-34	G3/4	56	28
EV1622-10	G1	56	31
EV1623-34	G3/4	61	28
EV1623-10	G1	61	31
EV1620M-34	G3/4	78	28
EV1620M-10	G1	78	31
EV1621M-34	G3/4	81	28
EV1621M-10	G1	81	31
EV1622M-34	G3/4	78	28
EV1622M-10	G1	78	31
EV1623M-34	G3/4	81	28
EV1623M-10	G1	81	31

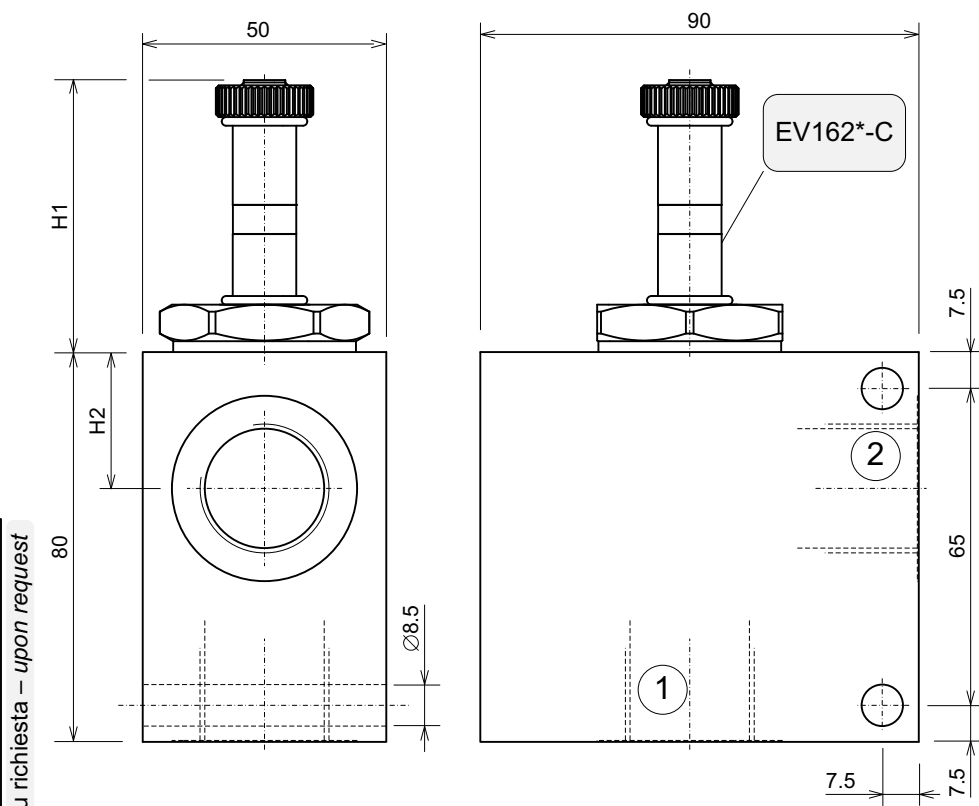

Sigla di ordinazione – Ordering code

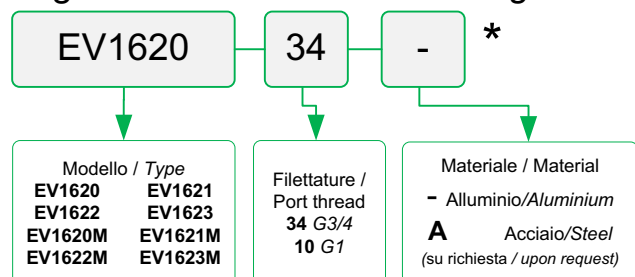

* Bobina venduta separatamente
Coil sold separately