

VNKR-ZD01 Series hydraulic motor with brake extending VNK series motor range. This motor has an integrated holding brake.

Characteristic features:

*Advanced manufacturing devices for the Geroler gear set , which use low pressure of start-up , provide smooth , reliable operation and high efficiency .

*Shaft seal can bear high pressure of back and the motor can be use in parallel or in series .

*Special design in the driver-linker and prolong operating life .

*Special design for distribution system can meet the requirement of low noise of unit .

*Compact volume and easy installation .

*Small volume and radial dimension,high holding torque,power brake,low weight and easy to install.

Main Specifaicion										
Type		VNKR ZD01 50	VNKR ZD01 80	VNKR ZD01 100	VNKR ZD01 125	VNKR ZD01 160	VNKR ZD01 200	VNKR ZD01 250	VNKR ZD01 315	VNKR ZD01 375
Geometric displacement (cm ³ /rev.)		51.7	81.5	102	128	157	195	253	318	381
Max. speed (rpm)	rated	490	479	478	421	341	276	212	169	141
	cont.	509	502	497	459	372	301	231	184	166
	int.	603	598	574	574	465	376	289	230	192
Max. torque (N•m)	rated	104	164	205	256	316	335	437	456	465
	cont.	103	203	254	317	391	359	437	456	465
	int.	88.6	160	200	250	308	333	473	502	520
Max. output (KW)	rated	5.3	8.2	10.3	11.3	11.3	9.7	9.7	8.1	6.9
	cont.	5.5	10.7	13.2	15.2	15.2	11.3	10.6	8.8	8.1
	int.	5.6	10	12	15	15	13.1	14.3	12.1	10.5
Max. Pressure drop (MPa)	rated	14	14	14	14	14	12	12	10	8.5
	cont.	14	17.5	17.5	17.5	17.5	13	12	10	8.5
	int.	17.5	20	20	20	20	17.5	13	11	9.5
Max. Flow (L/min)	rated	26	40	50	55	55	55	55	55	55
	cont.	27	42	52	60	60	60	60	60	65
	int.	32	50	60	75	75	75	75	75	75
Min. opening pressure (MPa)		1.7—2.2								
Max. inlet pressure (MPa)		25								
Max. brake release port pressure (MPa)		25								
Max. static torque (Nm)		500—550								
Weight (kg)		11,7	11,9	11,9	12,2	12,5	13	13,5	14	14,5

*Rated speed and rated torque:output value of speed and torque under rated flow and rated pressure.

*Continuous pressure:Max. value of operating motor continuously.


*Intermittent pressure:Max. value of operating motor in 6 seconds per minute .

*Peak pressure:Max. value of operating motor in 0.6 second per minute.

*Such kind of brake is only used in static paring brake.Dynamic braking in not recommenged.

When the motor integrated with brake is working, the pressure at releasing port must be more than 2.2MPa. In the status of braking, the pressure at releasing port must be less than 1.7 MPa, optimally 0 MPa. It is attention in use that the back pressure of the oil circuit is the best 0 MPa.

VNKR-ZD01 DIMENSIONS AND MOUNTING DATA

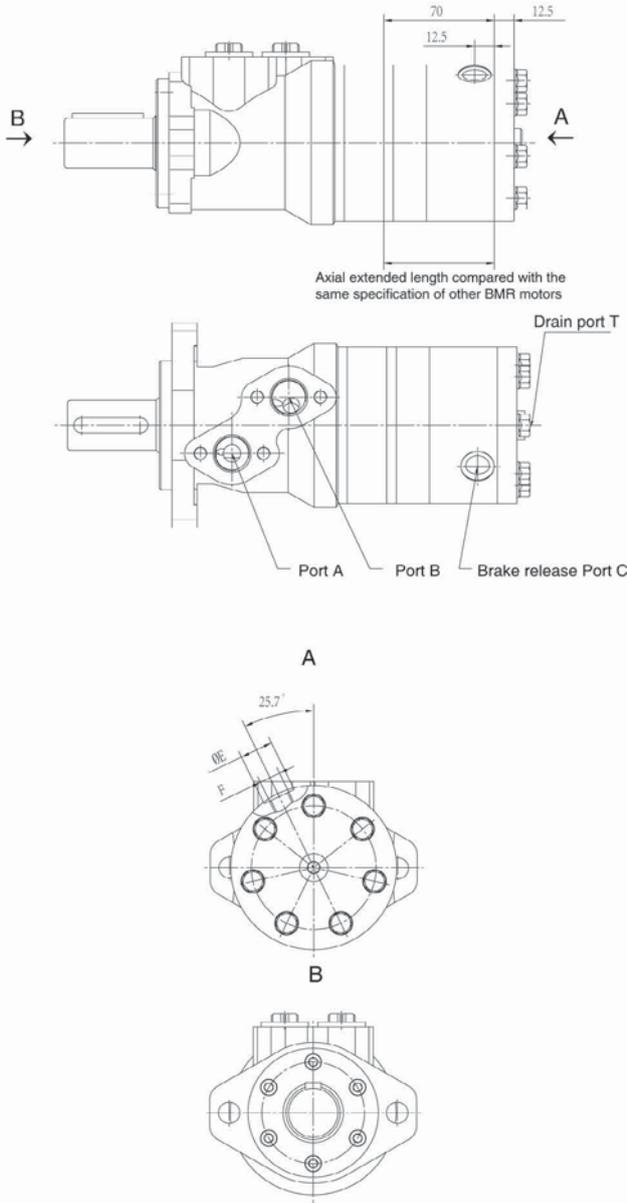

Model	Port C	E	F
	G	22	G1/4 Depth 9

Note: The mount data is completely referred to VNK series motor. The axial extended length reduces 70mm as picture. Port C is brake releasing port, the position is as picture.

Order information

1	2	3	4	5	6	7	8	9	
Pos.1	Code	Disp.	Flange	Output Shaft	Ports and Drain Port	Brake release Port	Rotation Direction	Paint	Unusually Function
50	A	2	2-Ø13.5Rhomb-flange, pilot Ø82.5x8	Shaft Ø25-parallel Key 8x7x32	D	G1/4	Standard	No paint	Standard
80	C	4	4-Ø13.5Rhomb-flange, pilot Ø82.5x8	Shaft Ø25-4, parallel Key 6.35x6.35x31.75	M	Depth 9	Omit	Blue	Big radial force
100	E	H4	4-Ø13.5Rhomb-flange, pilot Ø82.5x8	Shaft Ø25-4, splined tooth SAE 6B	S	facing Ø22	R	Black	No case drain
125	R	H5	4-3/8-16Square-flange, pilot Ø44.4x2.8	Short shaft Ø25-4, parallel Key 6.35x6.35x31.75	P			Silver grey	
160	B		4-M10Square-flange, pilot Ø44.4x2.8	Shaft Ø32-parallel Key 10x8x45					
200	F			Shaft Ø31.75-splined tooth 14-DP12/24					
250	FD			Long shaft Ø31.75-splined tooth 14-DP12/24					
315	G			Shaft Ø31.75, parallel Key 7.96x7.96x31.75					
375	T			Cone-Shaft Ø28.56, parallel Key B5x5x14	R				

Note: When the table is used, please fill the code of right rows in the table and give us, which the code information is consists of construction, displacement, mounting flange, output shaft and ports. If the specification is not in the table or you have specific requirements, please contact us.