
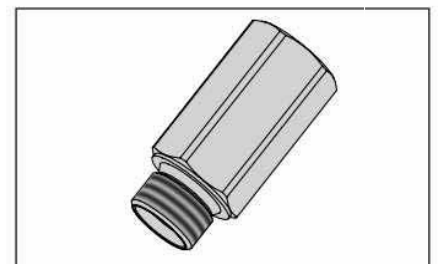
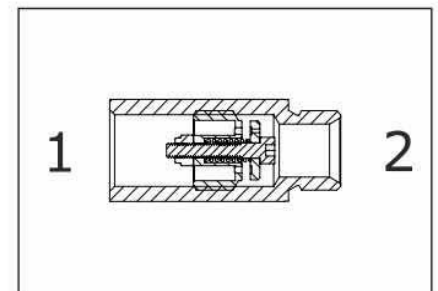


Male-Female Adapter Burst valves

Specification

Fluid viscosity:	10-550mm ² /s
Filtration:	ISO CODE 16/13
Fluid temperature:	-20°C +80°C
Ambient temperature:	-20°C +50°C
Max. Operating pressure:	350Bar

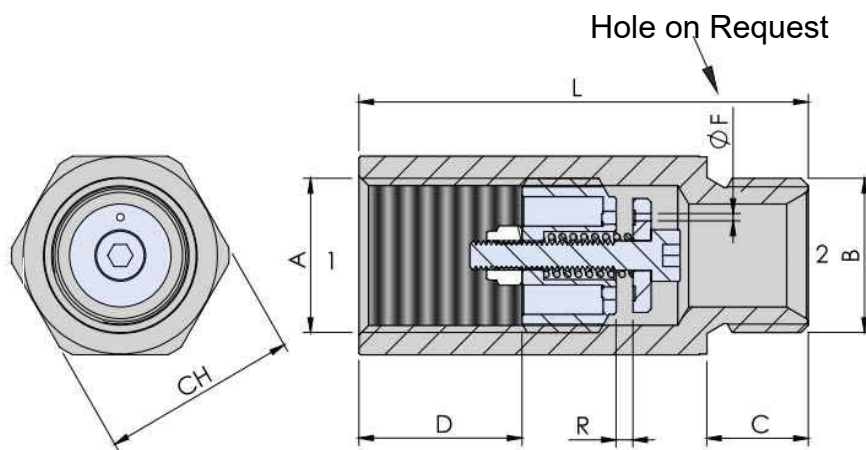

Code	A	B	C	D	L	R (Std)	CH	Weight (kg)	Max Flow (l/min)
K-BV-MF-14	1/4 BSPP	1/4 BSPP	12	20,5	50	0,9	19	0,077	25
K-BV-MF-38	3/8 BSPP	3/8 BSPP	13	22,5	58	1,5	24	0,140	50
K-BV-MF-12	1/2 BSPP	1/2 BSPP	14	22,5	62	2,3	27	0,181	80
K-BV-MF-34	3/4 BSPP	3/4 BSPP	16	24,5	75	2,5	32	0,295	150