



90° DOUBLE PILOT OPERATED CHECK VALVES DIN 2353

SPECIFICATIONS

Fluid viscosity:	10 - 550mm ² /s
Filtration:	ISO 16/13
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Max. operating pressure:	350 Bar
Standard seals:	NBR
Manifold material:	Zinc plated steel




DIMENSIONS (mm)

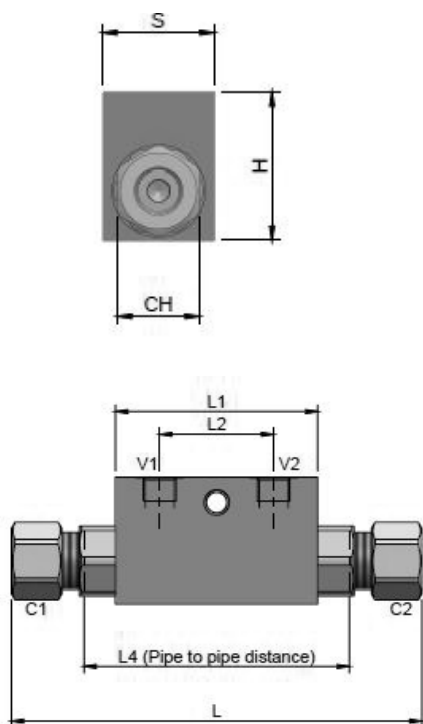

PERFORMANCE


Oil viscosity 24 mm³/s (3,5 °E) - Temperature 50°C

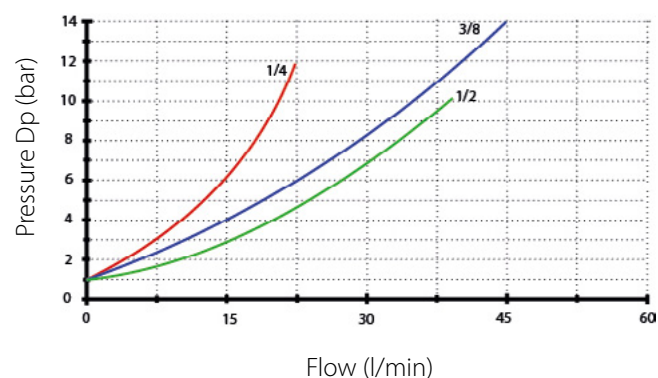

Standard code	Thread	Ø	L	L1	L2	L3	L4	H	S	CH	Weigh (kg)	Q max (l/min)	Pilot ratio
K-DPCLV-14-12L	1/4	12L	130	64	36	160	84	40	30	22	0.69	20	5.5 : 1
K-DPCLV-38-12L	3/8	12L	130	64	36	166	84	40	30	22	0.67	30	5.5 : 1
K-DPVLV-12-15L	1/2	15L	164	90	45	196	106	45	35	30	1.10	50	5 : 1


CHECK VALVES ACCESSORIES

BANJO PIPE

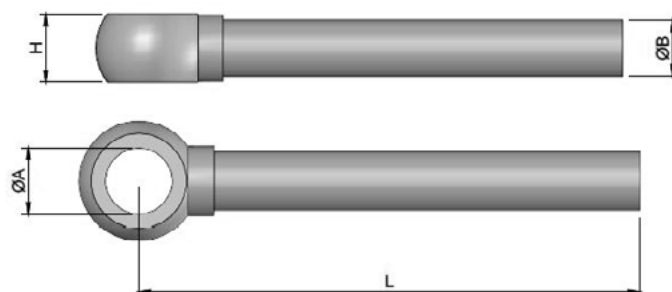

Standard code	Thread	Ø	L	H	ØA	ØB
VNKL050108.7	1/4	12L	40	13.3	12	14.5
VNKL050109	1/4	12L	100	13.3	12	14.5
VNKL050110	1/4	12L	300	13.3	12	14.5
VNKL050111	1/4	12L	500	13.3	12	14.5
VNKL050111.9	3/8	12L	40	17	12	17
VNKL050112	3/8	12L	100	17	12	17
VNKL050112.5	3/8	12L	200	17	12	17
VNKL050113	3/8	12L	300	17	12	17
VNKL050114	3/8	12L	500	17	12	17
VNKL050115	1/2	12L	100	21.2	15	22
VNKL050116	1/2	12L	300	21.5	15	22

BANJO AND NUT DIN 2353

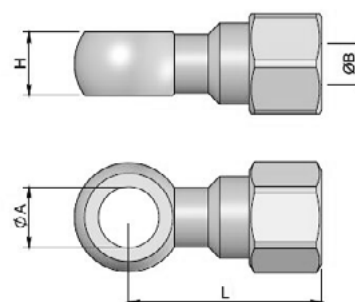

Standard code	Thread	Ø	L	H	ØA	ØB
VNKL050117	1/4	12L	43.5	14	13.3	12
VNKL050118	3/8	12L	38.5	17	17	12
VNKL050119	1/2	15L	44.5	22	21.2	15