




90° DOUBLE PILOT OPERATED CHECK VALVES

SPECIFICATIONS

Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Max. operating pressure:	350 Bar
Standard seals:	NBR
Manifold material:	Zinc plated steel




DIMENSIONS (mm)

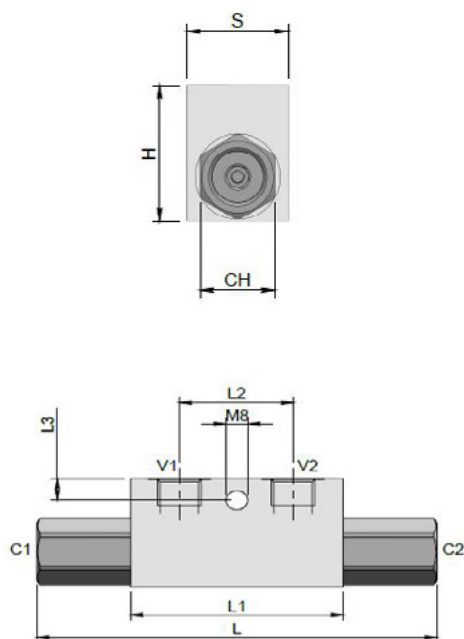

PERFORMANCE


Oil viscosity 24 mm²/s (3,5 °E) - Temperature 50°C

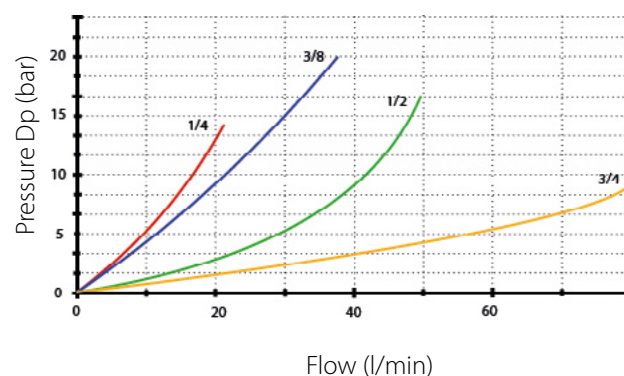

Standard code	Thread	L	L1	L2	L3	H	S	CH	Weigh (kg)	Q max (l/min)	Carcking P	Pilot ratio
K-DPCLV-14	1/4	113	64	36	8	40	30	22	0.65	20	4	5.5 : 1
K-DPCLV-38	3/8	128	68	38	8	40	30	22	0.75	35	3	5.5 1
K-DPCLV-12	1/2	142	90	45	12.5	45	35	27	1.05	50	6	5.1
K-DPCLV-34	3/4	192	100	46	12	60	40	36	1.95	100	2	4.1


CHECK VALVES ACCESSORIES

BANJO PIPE

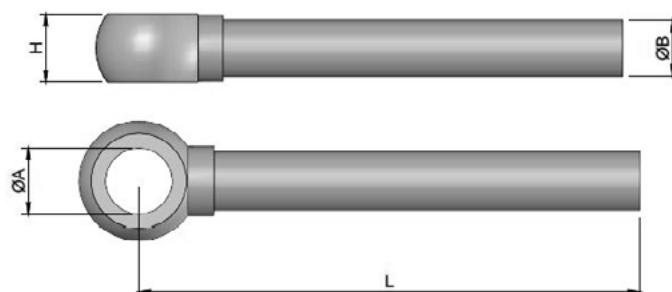

Standard code	Thread	Ø	L	H	ØA	ØB
VNKL050108.7	1/4	12L	40	13.3	12	14.5
VNKL050109	1/4	12L	100	13.3	12	14.5
VNKL050110	1/4	12L	300	13.3	12	14.5
VNKL050111	1/4	12L	500	13.3	12	14.5
VNKL050111.9	3/8	12L	40	17	12	17
VNKL050112	3/8	12L	100	17	12	17
VNKL050112.5	3/8	12L	200	17	12	17
VNKL050113	3/8	12L	300	17	12	17
VNKL050114	3/8	12L	500	17	12	17
VNKL050115	1/2	12L	100	21.2	15	22
VNKL050116	1/2	12L	300	21.5	15	22

BANJO AND NUT DIN 2353

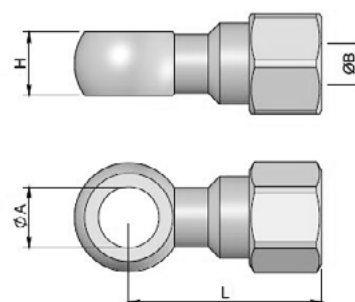

Standard code	Thread	Ø	L	H	ØA	ØB
VNKL050117	1/4	12L	43.5	14	13.3	12
VNKL050118	3/8	12L	38.5	17	17	12
VNKL050119	1/2	15L	44.5	22	21.2	15