
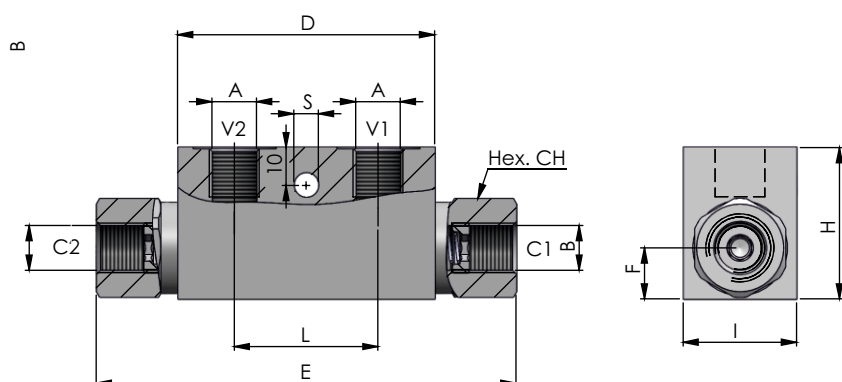
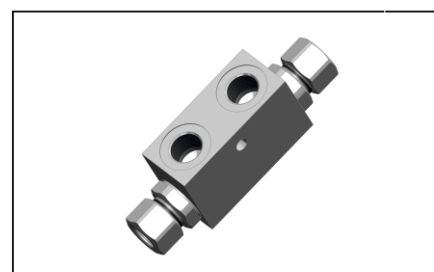
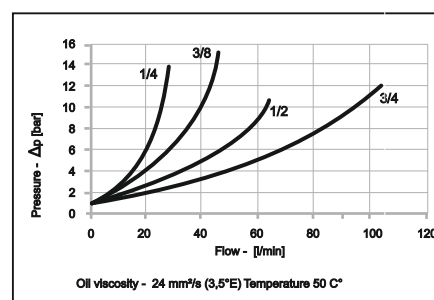


VINCKE HYDRAULIC LINE VALVES

Single pilot-operated check valves

Specification

Fluid viscosity:	10-550mm ² /s
Filtration:	ISO code 16/13
Fluid temperature:	-20°C +80°C
Ambient temperature:	-20°C +50°C
Galvanized Steel:	—

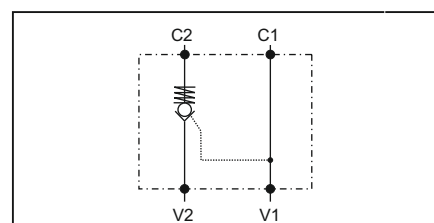

Code	A	B	D	E	F	H	I	L	S	Hex ch	Pilot Ratio	Max.Press. Press.Max (bar)	Weight (kg)	Max Flow (l/min)
K-SPCLV-14	1/4" BSPP	1/4" BSPP	68	111	13,5	40	30	38	6,5	24	4:1	350	0,674	30
K-SPCLV-38	3/8" BSPP	3/8" BSPP	68	111	13,5	40	30	38	6,5	24	4:1	350	0,672	30
K-SPCLV-12	1/2" BSPP	1/2" BSPP	80	158	18	50	30	40	8,5	30	3:1	300	1,063	50
K-SPCLV-34	3/4" BSPP	3/4" BSPP	100	192	22	60	40	46	8,5	32	4:1	300	1,800	100