





FLEXIBLE/ MEDIUM PRESSURE FIBERGLASS SLEEVE

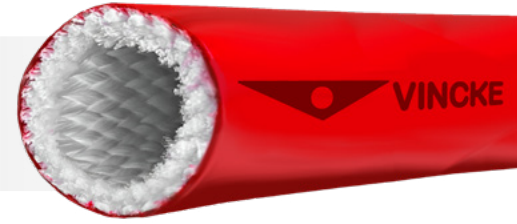

VINCKE-FI

| FIBERGLASS SLEEVE |  |  |  | |
|----------------------|---|---|---|----------------|
| Code | Inside Ø | Inside Ø | Wall thickness | Roll Length |
| | inch | mm | mm | m |
| FI06 | 1,4" | 06 | 1,5 | 50 |
| FI08 | 5/16" | 08 | 1,5 | 50 |
| FI10 | 3/8" | 10 | 2 | 25 |
| FI11 | 7/16" | 11 | 2 | 25 |
| FI13 | 1/2" | 13 | 2 | 25 |
| FI16 | 5/8" | 16 | 2 | 25 |
| FI19 | 3/4" | 19 | 2 | 25 |
| FI22 | 7/8" | 22 | 2 | 25 |
| FI25 | 1" | 25 | 2 | 25 |
| FI29 | 1 1/8" | 29 | 2 | 25 |
| FI32 | 1 1/4" | 32 | 2 | 25 |
| FI35 | 1 3/8" | 35 | 3 | 25 |
| FI38 | 1 1/2" | 38 | 3 | 25 |
| FI40 | 3/5" | 40 | 3 | 25 |
| FI41 | 1 5/8" | 41 | 3 | 25 |
| FI45 | 1 3/4" | 45 | 3 | 25 |
| FI48 | 1 7/8" | 48 | 3 | 25 |
| FI51 | 2" | 51 | 3 | 25 |
| FI55 | 2 1/5" | 55 | 3.5 | 50 |
| FI57 | 2 1/4" | 57 | 3.5 | 50 |
| FI60 | 2 3/8" | 60 | 3.5 | 20 |



| FIBERGLASS SLEEVE |  |  |  | |
|-------------------|---|---|---|-------------|
| Code | Inside Ø | Inside Ø | Wall thickness | Roll Length |
| | inch | mm | mm | m |
| FI64 | 2 1/2" | 64 | 3.5 | 20 |
| FI65 | 2 3/5" | 65 | 3.5 | 20 |
| FI70 | 2 3/4" | 70 | 3.5 | 20 |
| FI76 | 3" | 76 | 4 | 20 |
| FI80 | 3 1/5" | 80 | 4 | 20 |
| FI83 | 3 1/4" | 83 | 4 | 20 |
| FI85 | 3 3/8" | 85 | 4 | 20 |
| FI89 | 3 1/2" | 89 | 4 | 20 |
| FI90 | 3 9/16 | 90 | 4 | 20 |
| FI95 | 3 3/4" | 95 | 4 | 20 |
| FI102 | 4" | 102 | 5 | 10 |
| FI110 | 4 1/3" | 110 | 5 | 10 |
| FI114 | 4 1/2" | 114 | 5 | 10 |
| FI120 | 4 4/5" | 120 | 5 | 10 |
| FI127 | 5" | 127 | 5 | 10 |

Features:

Oil and water resistant. Can be chaped to fit the tightest bends. Includes fire tape to seal sleeve ends. Glass fiber sleeve with silicone rubber coating. Perfect for insulating wires, oil and fuel lines and protects against dirt and road grime. Withstands up to 1650C ambient heat, withstands 560C of direct continuous heat for glass fiber. Up to 260C for silicone rubber coating.

Product reaction:

Thermal protection; Insulated fireproof; Resistance to voltage; Heat isolation; Anti-corrosion and flexibility.

Application:

Main application to the steel smelting, non-ferrous metal smelting, power plant, shipyard etc, the high temperature areas that need to be protective of cable, hose and pipes.

Colour: Red, other colors can be customized under requirements.

Approval: UL/SGS/ROHS

Flame retardant: VW-1

