


LOW PRESSURE

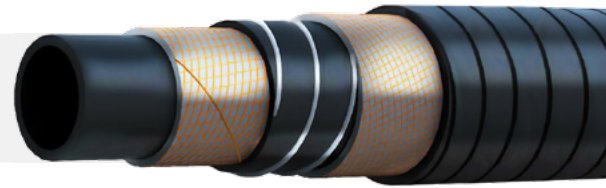

In Oil Return hose with steel wire helix. High Flexibility.

VINCKE HH-GR

GRECA-10						 				
Code	Nominal Ø		Inside Ø	Outside Ø	Max. Working Pressure		Burst Pressure	Minimum Bend Radius	Weight	
	Dash Size	inch	mm	mm	bar	psi	bar	psi	mm	g/m
GR-12	12	3/4"	19	29	10	150	30	450	65	463
GR-16	16	1"	25,4	36	10	150	30	450	85	614
GR-20	20	1 1/4"	31,8	43	10	150	30	450	110	852
GR-24	24	1 1/2"	38	49	10	150	30	450	130	993
GR-32	32	2"	50,8	63	10	150	30	450	175	1499
GR-40	40	2 1/2"	63,5	77	10	150	30	450	210	2096
GR-48	48	3"	76,2	90	10	150	30	450	250	2571
GR-64	64	4"	101,6	117	10	150	30	450	360	3820

Construction:

Tube: Oil and petrol resistant black NBR.

Reinforcement: High tensile synthetic textile, steel wire helix and antistatic copper wire.

Wrapped cover: Oil, weather, ozone, abrasion and sea water resistant, at-corrugated, special synthetic rubber.

Fluid resistance: Hydraulic uids on mineral, vegetable and synthetic oil, water based uids.

Temperature range: -30°C + 70°C Max

