


Medium pressure / Thermoplastic hose Hydraulic - Paint Spray

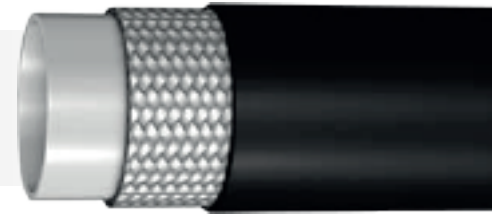

VINCKE TH-07V

SAE 100R7 DIN EN ISO 3949										
Code	Nominal ø		Inside ø	Outside ø	Max. Working Pressure		Burst Pressure	Minimum Bend Radius	Weight	
Dash Size	inch	mm	mm	mm	bar	psi	bar	psi	mm	g/m
07V02	02	1/8"	3,2	8,2	210	3045	840	12180	25	57
07V03	03	3/16"	4,8	10	210	3045	840	12180	25	80
07V04	04	1/4"	6,6	11,8	200	2900	800	11600	32	114
07V05	05	5/16"	8,18	14,3	190	2755	760	11020	45	142
07V06	06	3/8"	9,65	16	175	2538	700	10150	55	164
07V08	08	1/2"	12,7	20,3	140	2030	560	8120	77	229
07V10	10	5/8"	16	23,5	105	1523	420	6090	110	295
07V12	12	3/4"	19	26,5	90	1305	360	5220	140	356
07V16	16	1"	25,5	33,3	70	1015	280	4060	200	504

Construction:

Internal core Polyamide single

Reinforcement One or two braids of polyester fiber.

Temperature not to exceed +70°C for air and water based fluids.

Note: Available micro perforated and special colours available on request.

Cover Polyurethane

Temperature Range Continuous: -40°C to +100°C