


Medium pressure / Thermoplastic hose Hydraulic - Paint Spray

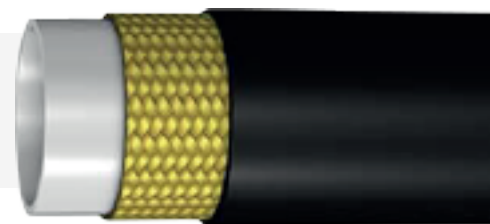

VINCKE TH-08Z

SAE 100R8 DIN EN ISO 3949													
Code	Nominal ø	Inside ø	Outside ø	Max. Working Pressure				Burst Pressure	Minimum Bend Radius			Weight	
Dash Size	inch	mm	mm	bar	psi	bar	psi	mm	g/m				
0802Z	02	1/8"	3,2	8,2	420	6090	1680	24360	25	57			
0803Z	03	3/16"	4,8	10	350	5075	1400	20300	25	80			
0804Z	04	1/4"	6,6	11,8	350	5075	1400	20300	32	114			
0805Z	05	5/16"	8,18	14,3	300	4350	1200	17400	45	142			
0806Z	06	3/8"	9,65	16	280	4060	1120	16240	55	164			
0808Z	08	1/2"	12,7	20,3	245	3552,5	980	14210	77	229			
0810Z	10	5/8"	16	23,5	200	2900	800	11600	110	295			
0812Z	12	3/4"	19	26,5	165	2392,5	660	9570	140	356			
0816Z	16	1"	25,5	33,3	140	2030	560	8120	200	504			

Construction:

Internal core Polyamide single - thermoplastic polyester twin.

Reinforcement One or two braids of aramid fiber.

Cover Polyurethane

Note: Available twin with different hose combination/size, also micro perforated and special colours available on request

Temperature Range: Continuous: -40°C to +100°C

Temperature not to exceed +70°C for air and water based fluids.

