


Medium pressure / Thermoplastic hose

Hydraulic Low Temperature

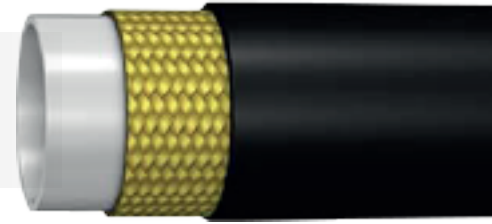

VINCKE TH-18

SAE 100R18										
Code	Nominalø		Inside ø	Outside ø	Max. Working Pressure		Burst Pressure	Minimum Bend Radius	Weight	
	Dash Size	inch	mm	mm	bar	psi	bar	psi	mm	g/m
1803	03	3/16"	4,8	10,5	250	3625	1000	14500	30	80
1804	04	1/4"	6,6	12,7	250	3625	1000	14500	45	120
1805	05	5/16"	8,18	15	250	3625	1000	14500	50	153
1806	06	3/8"	9,65	18	250	3625	1000	14500	75	188
1808	08	1/2"	12,7	22,5	210	3045	840	12180	90	298

Construction:

Internal core thermoplastic polyester
Reinforcement two braids of polyester fiber.

Cover Polyurethane

Note: Available twin with different hose combination/size, also micro perforated and special colours available on request.

Temperature Range: Continuous: -55°C to +100°C
Temperature not to exceed +70°C for air and water based fluids.

