








Medium pressure / Thermoplastic hose Hydraulic -NON CONDUCTIVE

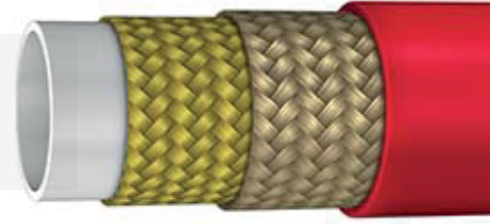

VINCKE TH-700

R8 700B										
Code	Nominalø		Inside ø	Outside ø	Max. Working Pressure		Burst Pressure	Minimum Bend Radius	Weight	
	Dash Size	inch	mm	mm	bar	psi	bar	psi	mm	g/m
7004	04	1/4"	6,6	14,8	700	10150	2800	40600	100	356
7005	06	3/8"	9,65	18,7	700	10150	2800	40600	150	513
7006	08	1/2"	12,7	23,4	550	7975	2200	31900	200	778

Construction:

Internal core thermoplastic polyester

Reinforcement two braids of aramid fiber or One or more braids of aramid fiber with one braid of steel wire.

Cover Polyurethane, orange colour

Temperature Range: Continuous: -40°C to +100°C

Temperature not to exceed +70°C for air and water based fluids.

Note: Available twin with different hose combination/size, also micro perforated and special colours available on request.

