



Male stud connector G2-RT (L Series)

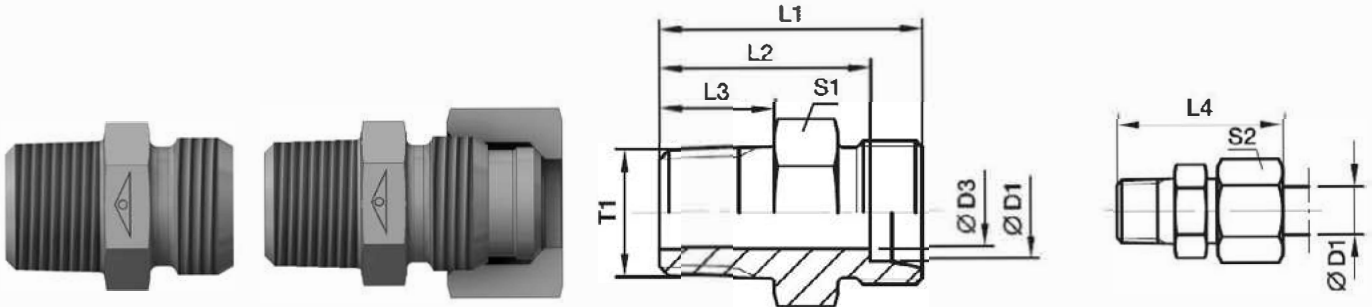

Series	Order code	D1	T	D3	L1	L2	L3	L4	S1	S2	Weight (g)	PN (bar)	
												Z	SS
L	G2-6LRT	06	R1/8 tap.	4.0	22	15.0	8	30	12	14	11	315	315
	G2-6LRT 1/4	06	R1/4 tap.	4.0	27	20.0	12	35	17	14	24	315	315
	G2-8LRT 1/8	08	R1/8 tap.	4.0	23	16.0	8	31	17	17	15	315	315
	G2-8LRT	08	R1/4 tap.	6.0	27	20.0	12	35	17	17	22	315	315
	G2-8LRT 3/8	08	R3/8 tap.	9.0	29	22.0	13	39	19	17	34	315	315
	G2-8LRT 1/2	08	R1/2 tap.	7.0	28	21.0	12	36	17	19	24	315	315
	G2-10LRT	10	R1/4 tap.	7.0	28	21.0	12	36	17	19	24	315	315
	G2-10LRT 3/8	10	R3/8 tap.	7.0	30	23.0	13	40	19	19	36	315	315
	G2-10LRT 1/2	10	R1/2 tap.	7.0	33	26.0	16	43	22	19	58	315	315
	G2-12LRT 1/4	12	R1/4 tap.	7.0	29	22.0	12	37	19	22	53	315	315
	G2-12LRT	12	R3/8 tap.	9.0	29	22.0	12	37	19	22	33	315	315
	G2-12LRT 1/2	12	R1/2 tap.	10.0	31	24.0	14	39	24	22	53	315	315
	G2-15LRT 3/8	15	R3/8 tap.	9.0	30	23.0	12	38	24	27	49	315	315
	G2-15LRT	15	R1/2 tap.	11.0	32	25.0	14	40	24	27	59	315	315
	G2-18LRT	18	R1/2 tap.	14.0	33	25.5	14	42	27	32	64	315	315
	G2-22LRT	22	R3/4 tap.	17.0	37	29.5	16	46	32	36	99	160	160
	G2-28LRT	28	R1 tap.	23.0	40	32.5	18	49	41	41	154	160	160
	G2-35LRT	35	R1 1/4 tap.	30.0	45	34.5	20	56	46	50	238	160	160
	G2-42LRT	42	R1 1/2 tap.	36.0	49	38.0	22	61	55	60	335	160	160

Male stud connector G2-RT (S series)

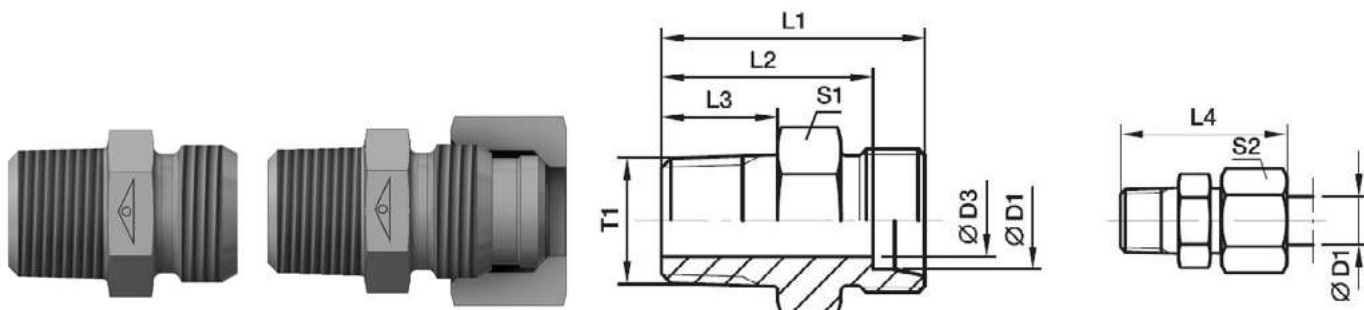

Series	Order code	D1	T	D3	L1	L2	L3	L4	S1	S2	Weight (g)	PN (bar)	
												Z	SS
S	G2-6SRT	06	R 1/4 tap.	4	32	25.0	13	31	17	17	32	630	630
	G2-8SRT	08	R 1/4 tap.	5	33	26.0	13	33	17	19	36	630	630
	G2-10SRT 1/4	10	R 1/4 tap.	5	33	25.5	13	44	19	22	41	630	630
	G2-10SRT	10	R 3/8 tap.	7	33	25.5	13	44	19	22	46	630	630
	G2-12SRT 1/4	12	R 1/4 tap.	5	35	27.5	13	46	22	24	56	630	630
	G2-12SRT	12	R 3/8 tap.	8	35	27.5	13	46	22	24	58	630	630
	G2-12SRT 1/2	12	R 1/2 tap.	8	38	30.5	16	49	22	24	75	630	630
	G2-14SRT 3/8	14	R 3/8 tap.	8	37	29.0	13	50	24	27	70	630	630
	G2-14SRT	14	R 1/2 tap.	10	40	32.0	16	53	24	27	82	630	630
	G2-16SRT 3/8	16	R 3/8 tap.	8	39	30.5	13	50	27	30	87	400	400
	G2-16SRT	16	R 1/2 tap.	12	42	33.5	16	53	27	30	96	400	400
	G2-20SRT	20	R 3/4 tap.	16	46	35.5	18	60	32	36	145	400	400
	G2-25SRT	25	R 1 tap.	20	50	38	20	67	41	46	240	400	400
	G2-30SRT 1	30	R 1 tap.	20	53	39.5	20	70	46	50	313	400	400
	G2-30SRT	30	R 1 1/4 tap.	25	54	43.0	21	71	46	50	356	400	400
	G2-38SRT	38	R 1 1/2 tap.	55	59	44.0	21	48	55	60	515	315	315