



Valvola regolatrice di flusso compensata due vie con valvola di non ritorno
 2 ways, pressure compensated flow regulator valve with check valve

mod. RF-A2-VU

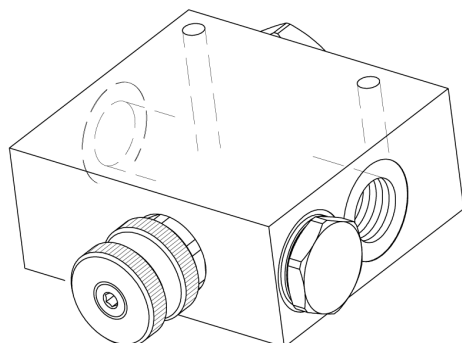


Corpo in alluminio
 Aluminium body



Modello Type	P, C	Portata max Max flow	Pressione max Max pressure
RF-A2-VU-38	3/8" GAS	40 l/min 10.5 gpm	270 bar 3900 psi
RF-A2-VU-12	1/2" GAS	45 l/min 12 gpm	270 bar 3900 psi
RF-A2-VU-34	3/4" GAS	90 l/min 24 gpm	270 bar 3900 psi
RF-A2-VU-10	1" GAS	190 l/min 50 gpm	270 bar 3900 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
 Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperatura di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

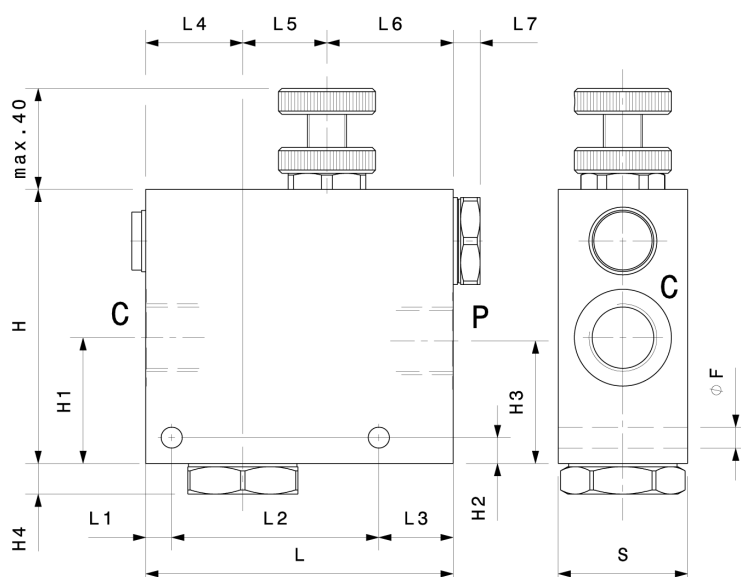

**Regolazioni
Adjustments**

A

Volantino
Handknob

B

Vite esterna
esagono incassato
Leakproof hex
socket screw

C

Manopola
Handknob

Modello Type	L	H	S	L1	L2	L3	L4	L5	L6	L7	H1	H2	H3	H4	F
RF-2-VU-38	95	85	40	8	64	23	30	26	39	6	39	8	39	10	6.5
RF-2-VU-12	95	85	40	8	64	23	30	26	39	8	39	8	39	10	6.5
RF-2-VU-34	130	100	50	10	110	10	40	35	55	4	44	11	44	10	8.5
RF-2-VU-10	145	110	50	8	82	55	40	40	65	5	44	10	44	10	8.5

Sigla di ordinazione / Ordering code

RF-A2-VU-34

B

Modello
Type

Codice di regolazione
Adjustment code
A, B, C