



Valvola regolatrice di flusso compensata, tre vie, ghisa
3 ways, pressure compensated flow regulator valve, cast iron

mod. **RF-G**


Corpo in ghisa
Cast iron body

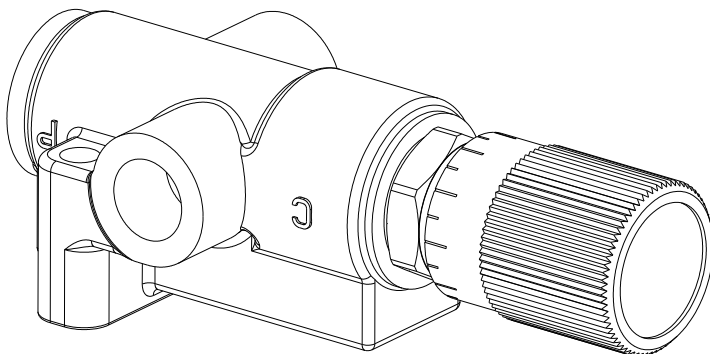

Portata massima <i>Max flow</i>	90 l/min
Portata regolata <i>Regulated flow</i>	2 ÷ 50 l/min
Pressione massima <i>Max pressure</i>	350 bar

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperatura di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

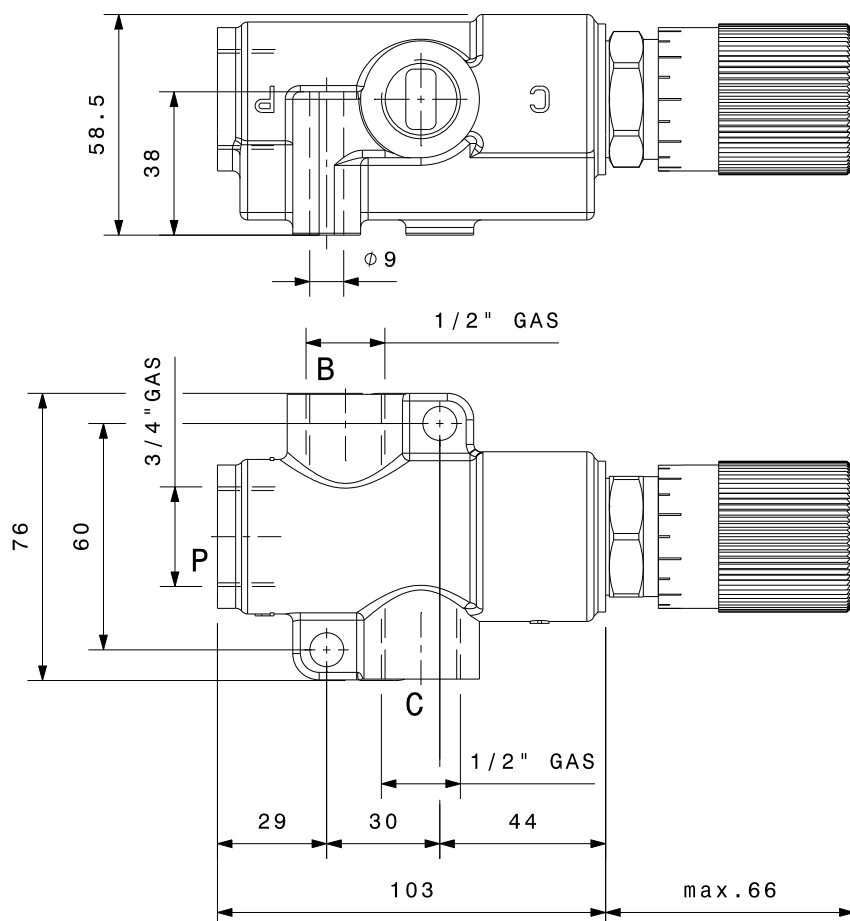

Sigla di ordinazione / Ordering code

RF-G

Modello
Type