



mod. RFP-A

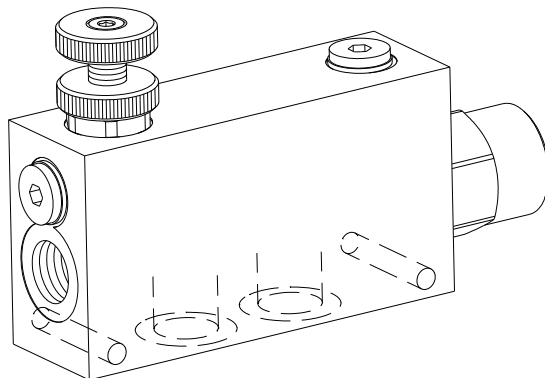


Modello <i>Type</i>	P, B C	Portata massima <i>Max flow</i> l/min		Pressione massima <i>Max pressure</i> bar
		Ingresso <i>Inflow</i> P	Regolata <i>Regulated</i> C	
RFP-A-38	3/8"	60	35	270
RFP-A-12	1/2"	100	65	270
RFP-A-34	3/4"	150	90	270
RFP-A-10	1"	380	190	270

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C <i>Performaces and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C</i>	
Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperature di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

A max. 40
 $\phi 30$
 Volantino Handknob

B ES. 4 max. 40
 ES. 18
 Vite esterna esagono incassato
 Leakproof hex socket screw

C $\phi 40$
 max. 65
 3 2 1
 Manopola Handknob

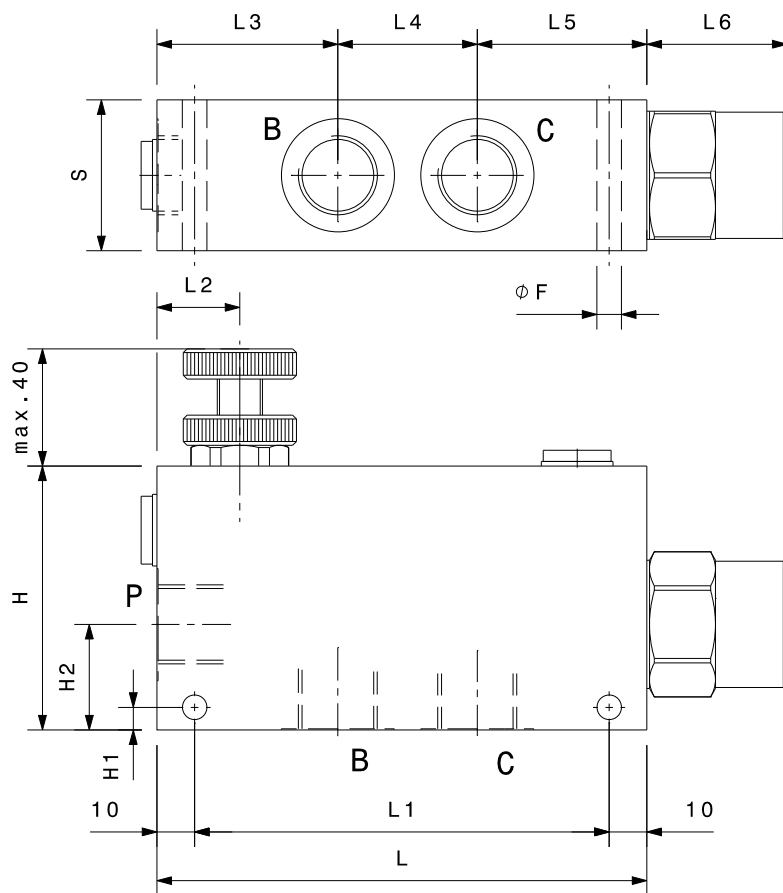

Modello <i>Type</i>	L	L1	L2	L3	L4	L5	L6	H	H1	H2	F	S
RFP-A-38	130	110	22	48	37	45	38	70	6	28	6.5	40
RFP-A-12	130	110	22	48	37	45	38	70	6	28	6.5	40
RFP-A-34	155	135	25	57	44	54	35	90	8	35	8.5	50
RFP-A-10	150	130	27	48	54	48	55	130	10	65	8.5	60

Sigla di ordinazione / Ordering code

RFP-A-34

B

—

Modello
Type

Codice regolazione
Adjustment code
A, B, C

Materiale *Material*

- Alluminio / *Aluminium*

A Acciaio / *Steel*