

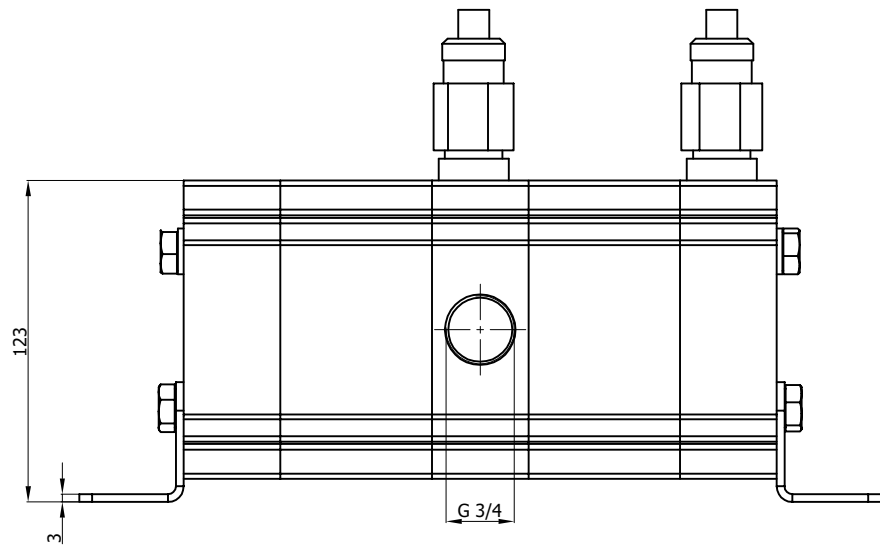


A
B
C
D
E
F
G
H


DO NOT SCALE

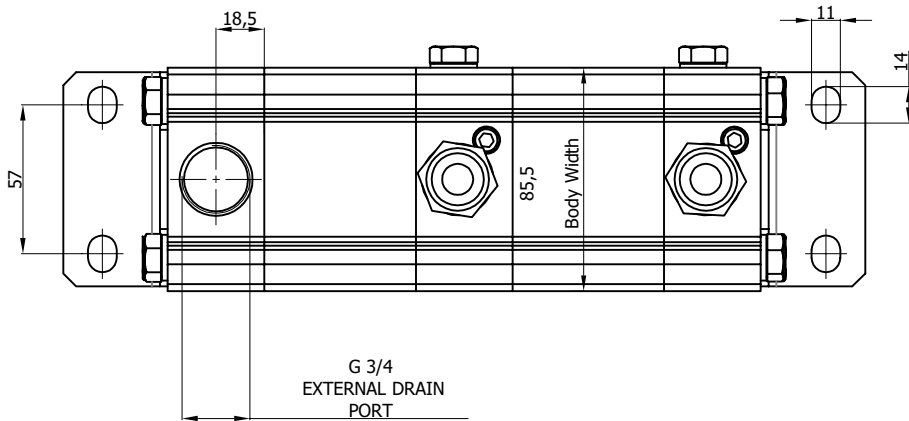

INLET PORT

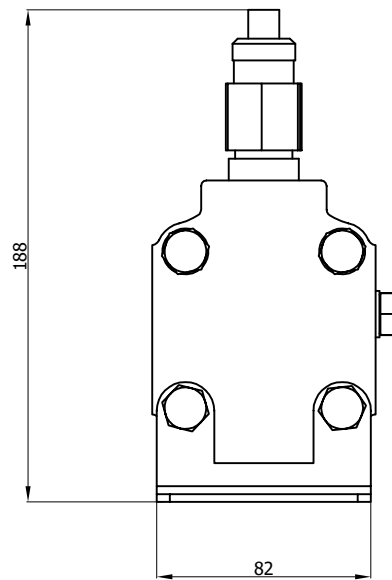


G 3/4
EXTERNAL DRAIN
PORT

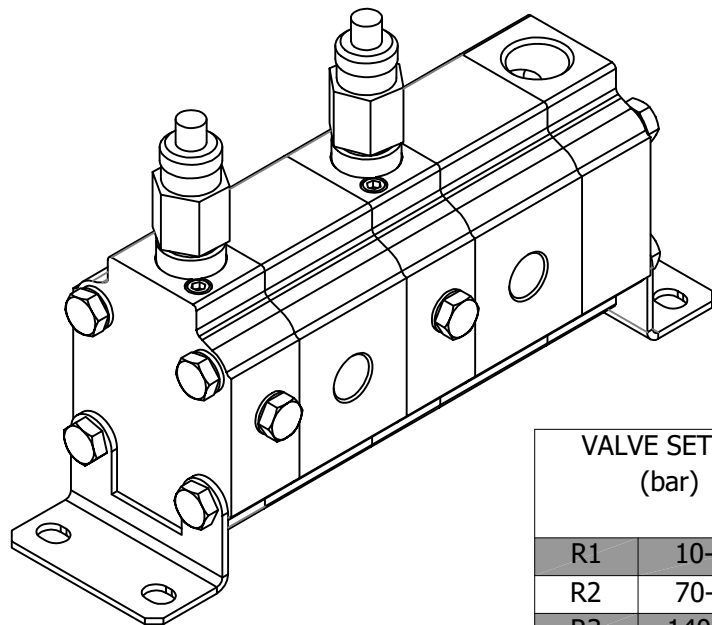

VALVE SETTING
(bar)

R1	10-105
R2	70-210
R3	140-350



Model	K	Displacement cm ³ /rev	Max. Pressure (bar)		ΔP (bar)	Max Speed	Min. Speed	Min. Flow Rate	Max. Flow Rate
			P1	P3		rpm		l/min	
KFD2.2-4	46,5	3,9	250	280	50	3000	1250	4,8	11,2
KFD2.2-6	49,5	5,9	250	280	50	3000	1250	7,3	16,8
KFD2.2-8	52,5	8,0	250	280	50	3000	1250	10,0	22,8
KFD2.2-9,5	55,0	9,4	250	280	50	2750	1200	11,2	24,6
KFD2.2-11,5	58,0	11,4	250	280	50	2750	1200	13,8	29,8
KFD2.2-14	62,0	13,9	230	260	40	2750	1200	16,6	36,3
KFD2.2-16	65,0	16,0	230	260	40	2500	1200	19,2	38,0
KFD2.2-19	82,0	19,2	210	240	40	2500	1100	22,0	46,0
KFD2.2-22	86,5	21,9	190	220	40	2000	1100	25,2	47,8
KFD2.2-25	91,6	24,8	170	200	30	2000	1100	28,5	52,0
KFD2.2-28	96	27,9	160	190	30	2000	1100	32,0	54,7

P1: Continuous pressure

P3: Peak pressure

MAX. FLOW FOR INLET SECTION
80 l/min

PROJECT NO:

E. C. NO:

REV. ISSUE

CHANGED

CHECKED

DATE

F.B. 21.09.2018

SCALE 1/1

CAD
DRAW

TOLERANCES
(UNLESS OTHERWISE STATED)

< 6 : ± 0.10
> 6 < 30 : ± 0.20
> 30 < 100 : ± 0.30

ANGLES ± 0.5

PART NAME:

FLOW DIVIDER VALVE+ANTICAVITATION ASSEMBLY

CHECKED

DATE

21.09.2018

MATERIAL

VINCKE

DRAWING NO:

KFD2...4 : 28

1

A