


# Filtri olio in aspirazione attacco filettato “bsp”

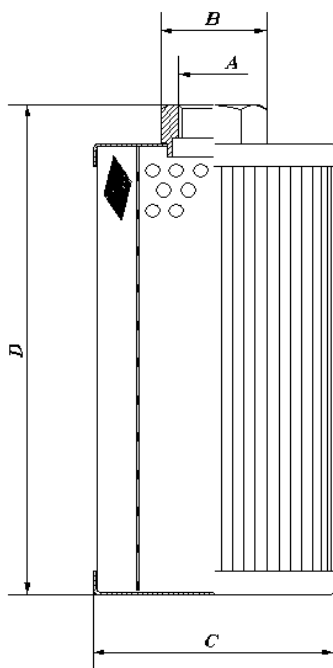

Dimensioni – Dimension – Dimensions - Ausmass

| Mod.      | A<br>(bsp) | B<br>(mm.) | C<br>(mm.) | D<br>(mm.) | Portata/Flow<br>l/min. |
|-----------|------------|------------|------------|------------|------------------------|
| FR1.04482 | 3/8"       | 22         | 45         | 40         | 5                      |
| FR1.06600 | 3/8"       | 22         | 45         | 55         | 8                      |
| FR1.04483 | 3/8"       | 22         | 45         | 75         | 10                     |
| FR3.04484 | 1/2"       | 30         | 45         | 105        | 15                     |
| FR2.04485 | 3/4"       | 36         | 63         | 110        | 25                     |
| FR8.04486 | 1"         | 46         | 63         | 140        | 50                     |
| FR8.04487 | 1"1/4      | 60         | 89         | 125        | 75                     |
| FR8.04488 | 1"1/2      | 60         | 89         | 145        | 100                    |
| FR8.04489 | 1"1/2      | 60         | 89         | 200        | 130                    |
| FR8.04490 | 2"         | 75         | 89         | 260        | 180                    |
| FR8.04491 | 2"         | 75         | 140        | 150        | 225                    |
| FR8.04492 | 2"1/2      | 95         | 140        | 215        | 350                    |
| FR8.04493 | 3"         | 100        | 150        | 270        | 500                    |

Caratteristiche tecniche :

- Temperatura di esercizio -30°C. +100°C.
- Elemento filtrante in tela inox 100 mesh

