

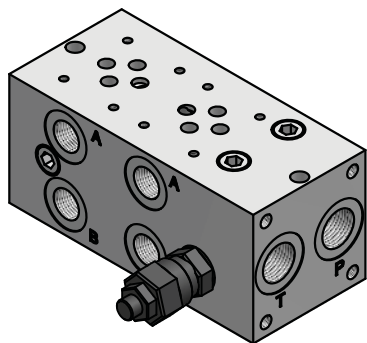
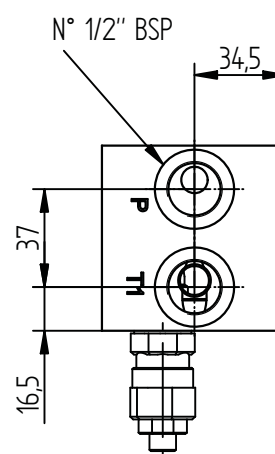
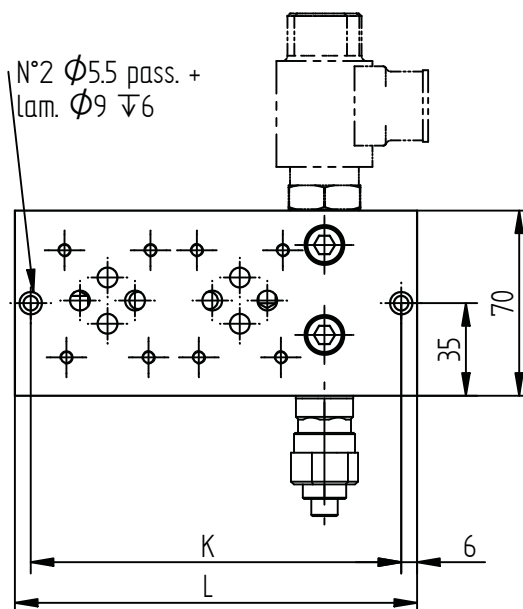
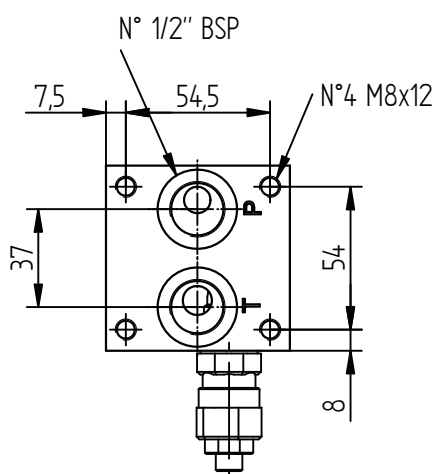


MONOBLOCCO A-B LATERALI 3/8" P-T 1/2" BSP CON VALVOLA EL. OPZIONALE
MONOBLOCK A-B ON SIDE 3/8" P-T 1/2" BSP WITH OPTIONAL VENTING VALVE

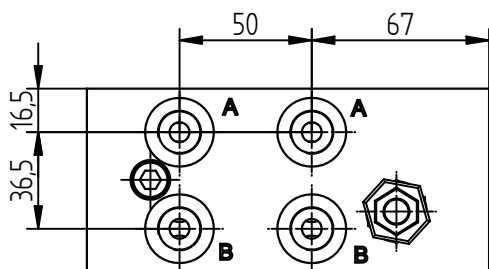

Schema idraulico
Hydraulic diagram

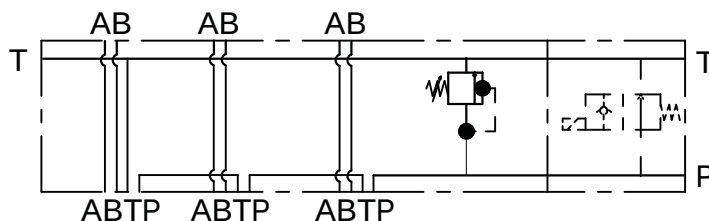

Valve and cavity = see page C01

ES 06-19-38-02-0-0-H-12AC

S=STEEL
A=ALUMINIUM
MOUNTING POSITIONS: 02÷08
0=WITHOUT RELIEF VALVE
1=WITH R. V.
2=R. V. READY
3=VENTING VALVE READY
4=WITH R. V. and V. V. READY
5=WITH R. V. and V. V.

OPTIONAL:
ELECTRICAL VALVE VOLTAGE:
12AC - 12DC - 24AC - 24DC

H=HEXAGONAL HEAD SCREW
K=KNOB see page V01

0=WITHOUT R.V.
1=5-50 BAR
2=30-100 BAR
3=50-250 BAR
4=100-350 BAR

POS.	02	03	04	05	06	07	08
H	152	202	252	302	352	402	452
K	140	190	240	290	340	390	440