



RELIEF MOTOR VALVES VNKP/VNKR

SPECIFICATIONS

Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Max. operating pressure:	350 Bar
Standard seals:	NBR
Manifold material:	Zinc plated steel

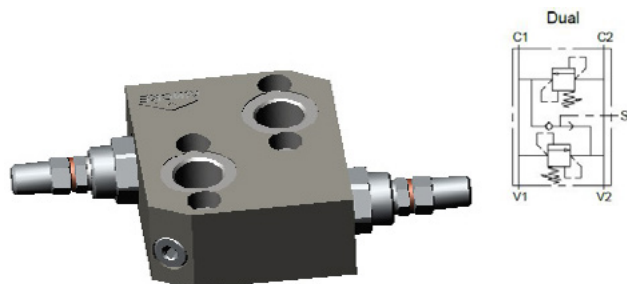


DIMENSIONS (mm)

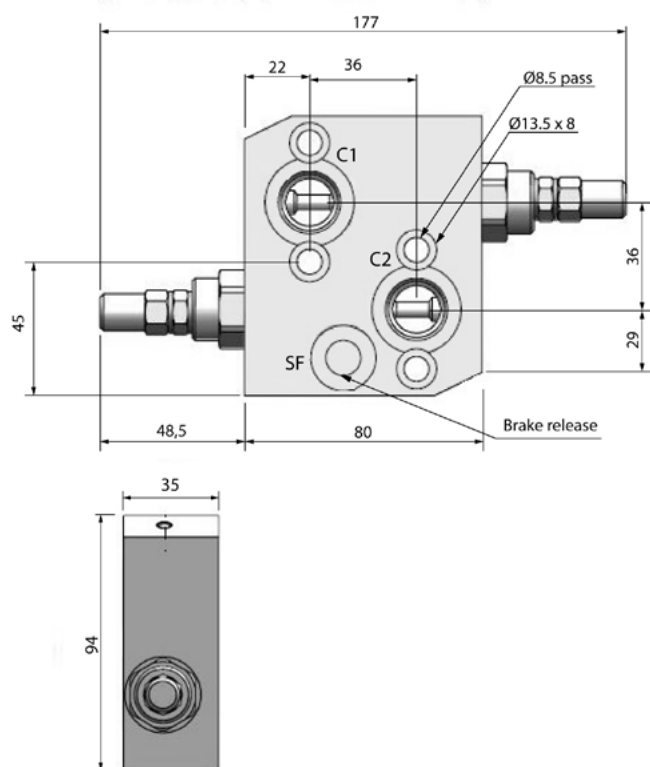

PERFORMANCE

Oil viscosity 24 mm²/s (3,5 °E) - Temperature 50°C

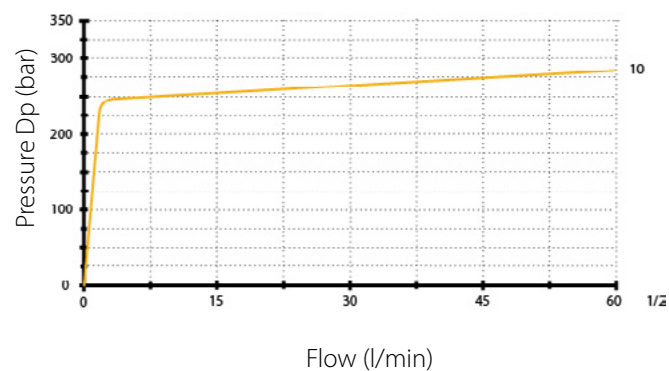

Std setting at 5 l/min

10 = 50 - 250 bar

130 bar

Standard code

K-FPR-DRLVD

Thread

1/2

Weight (kg)

1.7

Q max (l/min)

60