




VNKP/R 3-WAY FLOW CONTROL VALVES

SPECIFICATIONS

Max flow 10 ÷ 90 l/m	Regulated flow 2 ÷ 45 l/m
Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C+90°C
Ambient temperature:	-20°C
Max Pressure aluminium:	250 Bar
Max Pressure steel:	420 Bar
Standard seals:	NBR
External surfaces:	Zinc plated steel

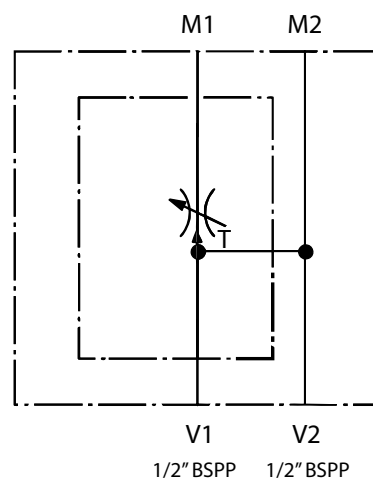


DIMENSIONS(mm)

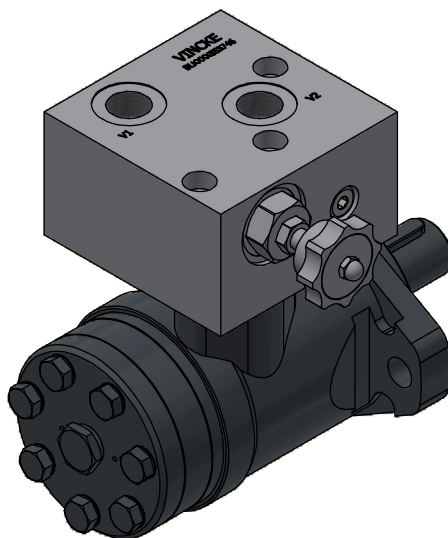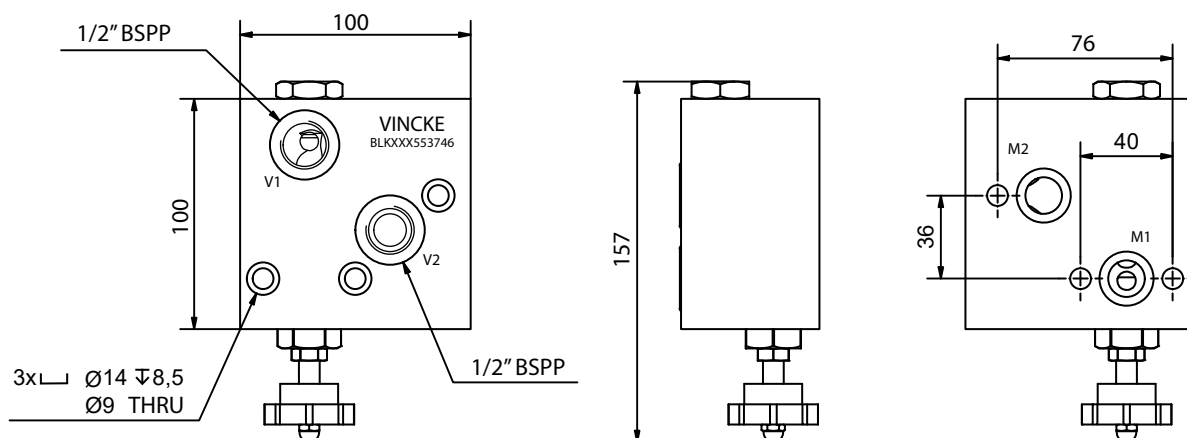

VNKP/R 3-WAY FLOW CONTROL VALVES

SPECIFICATIONS

Max flow	10 ÷ 90 l/m	Regulated flow	2 ÷ 45 l/m
Fluid viscosity:	ISO 3448		
Filtration:	ISO 4406		
Fluid temperature:	-20°C+90°C		
Ambient temperature:	-20°C		
Max Pressure aluminium:	250 Bar		
Max Pressure steel:	420 Bar		
Standard seals:	NBR		
External surfaces:	Zinc plated steel		

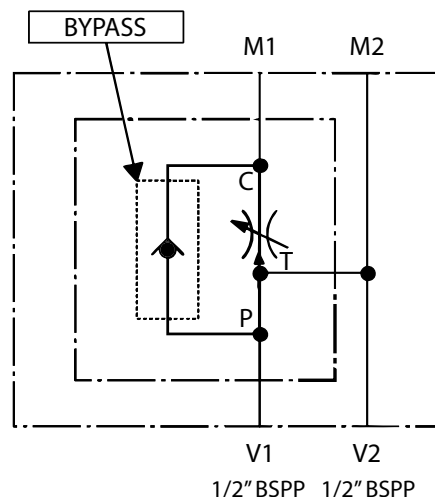

DIMENSIONS(mm)

