


INSTALLATION AND OVERALL DIMENSIONS

Frame Size	Mounting Dimensions (mm)						Shaft				Overall Dimensions				
	IMB14														
	M	N	P	R	S	T	D	E	F	G	AB	AC	AD	HD	L
63	75	60	90	0	M5	2.5	11	23	4	8.5	130	130	120	188	235
71	85	70	105	0	M6	2.5	14	30	5	11	145	145	135	206	250
80	100	80	120	0	M6	3	19	40	6	15.5	160	165	145	225	305
90S	115	95	140	0	M8	3	24	50	8	20	180	185	155	245	335
90L	115	95	140	0	M8	3	24	50	8	20	180	185	155	245	360
100L	130	110	160	0	M8	3.5	28	60	8	24	205	215	170	270	405

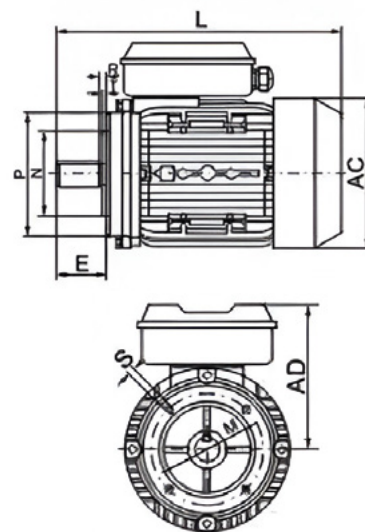

TECHNICAL DATA 2 POLES

Model	Rated Power		Voltage	Rated Current	Speed	Eff.	P.F.	Tst/Tn	Tmax/Tn	Starting Current	Weight
	kW	HP								A	kg
VNKMM1-631-2	0,18	0,25	220	1,55	2800	63,0	0,92	2,0	1,8	5,0	5,0
VNKMM1-632-2	0,25	0,35	220	1,80	2800	65,0	0,92	2,0	1,8	6,0	5,5
VNKMM1-711-2	0,37	0,5	220	2,73	2800	67,0	0,92	2,3	1,8	16,0	7,0
VNKMM1-712-2	0,55	0,75	220	3,88	2800	70,0	0,92	2,5	1,8	21,0	8,0
VNKMM1-801-2	0,75	1	220	5,15	2800	72,0	0,92	2,5	1,8	30,0	8,5
VNKMM1-802-2	1,10	1,5	220	7,02	2800	75,0	0,95	2,5	1,8	40,0	9,5
VNKMM1-90S-2	1,50	2	220	9,44	2800	76,0	0,95	2,5	1,8	55,0	12,5
VNKMM1-90L-2	2,20	3	220	13,60	2800	77,0	0,95	2,5	1,8	80,0	14,0
VNKMM1-100L-2	3,00	4	220	18,20	2800	79,0	0,95	2,5	1,8	110,0	20,5

4 POLES

Model	Rated Power		Voltage	Rated Current	Speed	Eff.	P.F.	Tst/Tn	Tmax/Tn	Starting Current	Weight
	kW	HP								A	kg
VNKMM1-631-4	0,12	0,16	220	1,25	1400	53,0	0,92	2,0	1,7	3,0	5,0
VNKMM1-632-4	0,18	0,25	220	1,65	1400	54,0	0,92	2,0	1,7	5,0	5,5
VNKMM1-711-4	0,25	0,35	220	1,99	1400	62,0	0,92	2,5	1,8	12,0	6,9
VNKMM1-712-4	0,37	0,5	220	2,81	1400	65,0	0,92	2,5	1,8	16,0	8,1
VNKMM1-801-4	0,55	0,75	220	4,00	1400	68,0	0,92	2,5	1,8	21,0	8,9
VNKMM1-802-4	0,75	1	220	5,22	1400	71,0	0,92	2,5	1,8	30,0	9,6
VNKMM1-90S-4	1,10	1,5	220	7,20	1400	73,0	0,95	2,5	1,8	40,0	13,0
VNKMM1-90L-4	1,50	2	220	9,57	1400	75,0	0,95	2,5	1,8	55,0	16,0
VNKMM1-100L1-4	2,20	3	220	13,90	1400	76,0	0,95	2,5	1,8	80,0	23,0
VNKMM1-100L2-4	3,00	4	220	18,60	1400	77,0	0,95	2,5	1,8	110,0	27,0