
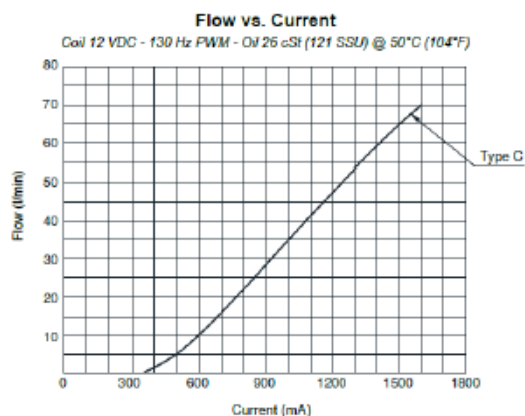
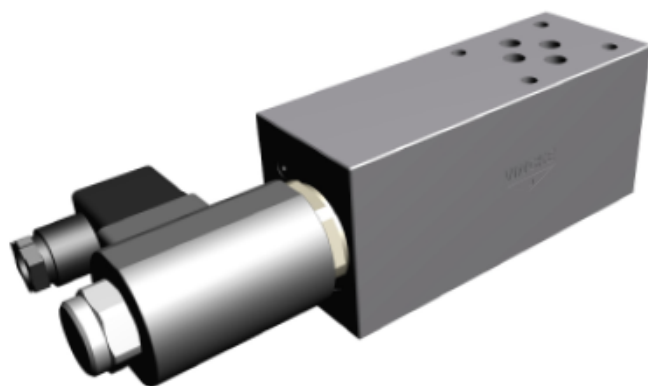


## VINCKE HYDRAULIC LINE VALVES

### PROPORTIONAL FLOW REULATOR

Specification	
Flow Range:	See curves for various versions
Max. System Pressure:	3500 PSI (241bar)
Leakage:	15.7 cu-in/min @ 3000 PSI 250 cc/min @ 207 bar
Hysteresis:	±5%
Viscosity Range:	36 to 3000 SSU (3 to 647 cSt)
Filtration:	ISO 18/16/13
Media Operating Temp. Range:	-30°C +100°C
Weight:	75lbs (34kg)
Operating Fluid Media:	General Purpose Hydraulic Fluid
Cartridge Torque Requirements:	37 ft-lbs (50 Nm)
Coil Nut Torque Requirements:	2-3 ft-lbs (3-4Nm)
External surfaces:	Zinc plated/zincate
Standard seals:	NBR 70 Shore A



Code	Type	Q l/min Reg	Max. P (bar)	Volt.
VNKPRC06000	VNKPFR-6-A CETOP 3	60	350	12 DC