

TECHNICAL DATA

Standard	ISO 15171-1
Occlusion:	flat face
Locking:	radial balls
Material:	steel
Finishing:	Zinc plated
Threads:	BSPP - NPTF - SAE - METRICS
Standard seals:	NBR
Working temperature:	-25° C + 100° C
Optional seals:	FKM
Workings pressure:	470 bar
Connection under residual pressure:	not allowed




Applications:

VSD series checks pressure in industrial equipment, mobile equipment, agricultural equipment and construction equipment.

Interchange Standard

Parker PD
Faster DF
Holmbury DTP
Aeroquip FD90
DnpPLD3

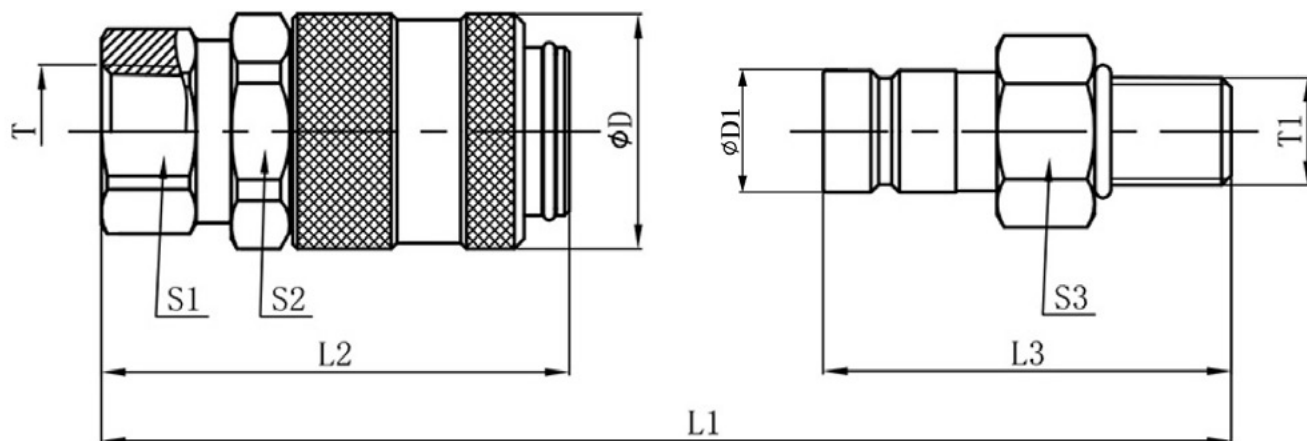

Type	ISO Ø	L1	L2	L3	ØD	ØD1	S1	S2	S3	T	T1
VSD14	6,3	78	46,6	45,8	24	12,6	19	22	17,5	NPT 1/8"	UNF 7/16"
VSD38	6,3	70	46,6	37,8	24	12,6	19	22	17,5	BSPP 1/8"	UNF 9/16"
VSD12	6,3	74	46,6	41,8	24	12,6	19	22	17,5	NPT 1/4"	NPT 1/4"
VSD34	6,3	70	46,6	37,8	24	12,6	19	22	17,5	BSPP 1/4"	BSPP 1/4"
VSD100	6,3	70	46,6	37,8	24	12,6	19	22	17,5	M14x1,5	M14x1,5