



Direct acting sequence valve

mod. **VSQ**

Aluminium body

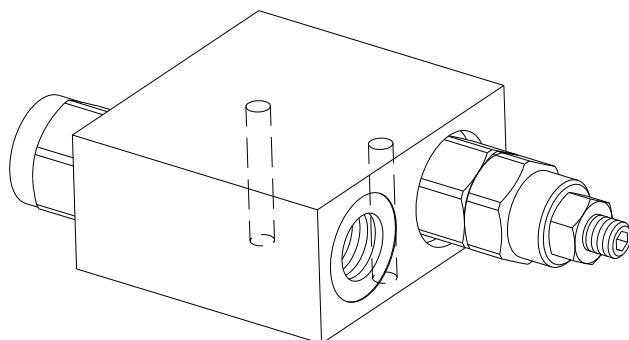

Type	P, C	Max pressure bar	Max. flow l/min
VSQ40-38	3/8" GAS	300	40
VSQ40-12	1/2" GAS	300	40
VSQ80-12	1/2" GAS	300	80
VSQ80-34	3/4" GAS	300	80

Taratura Setting


Code	Standard setting bar (Q=5 l/min)	Adj. Pressure range bar
00	40	5÷40
01	80	20÷100
02	180	40÷250
03	250	60÷350

Regolazioni Adjustments

A Vite esterna esagono incassato Leakproof hex socket screw	B Volantino e dado Handknob and locknut	C Piombatura Sealing cap	D Cappello Cap
---	---	---	---------------------------------


Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Recommended viscosity	10 ÷ 420 cSt
Working temperature	-20 ÷ +90 °C
Absolute filtration	25 µ

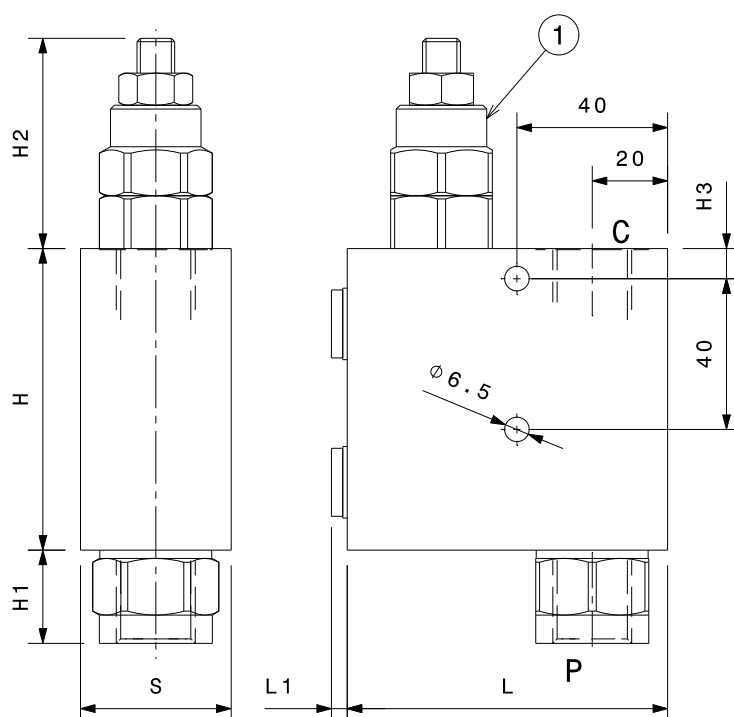

Dimensions	①	L	L1	H	H1	H2	H3	S
VSQ40-38	VLP40C	80	0	70	25	50	5	30
VSQ40-12	VLP40C	80	0	70	25	50	5	30
VSQ80-12	VLP80C	85	4	80	25	56	8	40
VSQ80-34	VLP80C	85	4	80	30	56	8	40



Ordering code

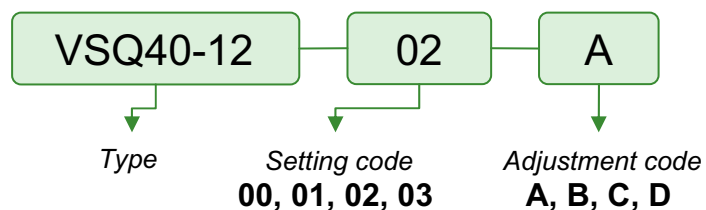

In line, direct acting sequence valve

mod. **VSQ-L**

Aluminium body

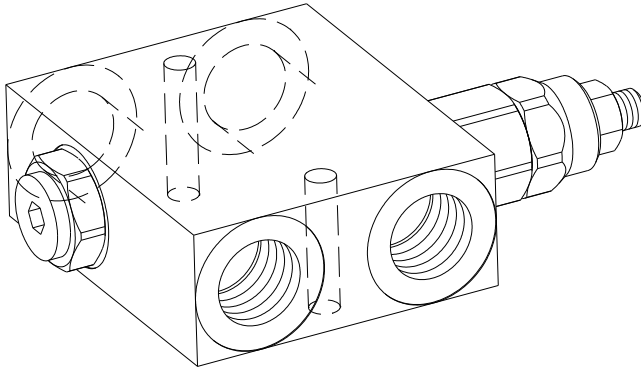

Type	P, C	Max pressure bar	Max. flow l/min
VSQ40-L-38	3/8" GAS	300	40
VSQ40-L-12	1/2" GAS	300	40
VSQ80-L-12	1/2" GAS	300	80
VSQ80-L-34	3/4" GAS	300	80
VSQ130-L-34	3/4" GAS	300	130
VSQ130-L-10	1" GAS	300	130

Taratura Setting

Code	Standard setting bar (Q=5 l/min)	Adj. Pressure range bar
00	40	5÷40
01	80	20÷100
02	180	40÷250
03	250	60÷350

Adjustments


A 	B 	C 	D
Leakproof hex socket screw	Handknob and locknut	Sealing cap	Cap

Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Recommended viscosity	10 ÷ 420 cSt
Working temperature	-20 ÷ +90 °C
Absolute filtration	25 µ

Ordering code

VSQ40-L-12	02	A
Type	Setting code 00, 01, 02, 03	Adjustment code A, B, C, D

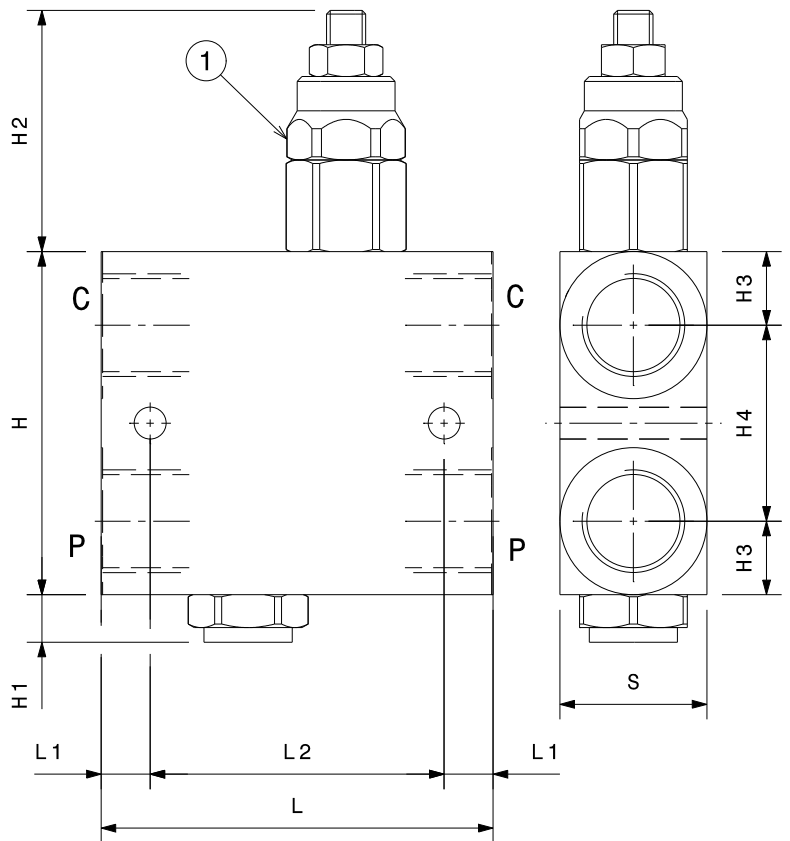

Dimensions	①	L	L1	L2	H	H1	H2	H3	H4	F	S
VSQ40-L-38	VLP40C	80	10	60	70	10	50	15	40	6.5	30
VSQ40-L-12	VLP40C	80	10	60	70	10	50	15	40	6.5	30
VSQ80-L-12	VLP80C	100	10	80	70	19	62	16	38	6.5	35
VSQ80-L-34	VLP80C	100	10	80	90	19	62	19	52	6.5	40
VSQ130-L-34	VLP130CD	110	15	80	90	19	62	19	52	8.5	40
VSQ130-L-10	VLP130CD	120	15	90	100	15	57	23	54	8.5	60