




POWER PACK SINGLE ACTING

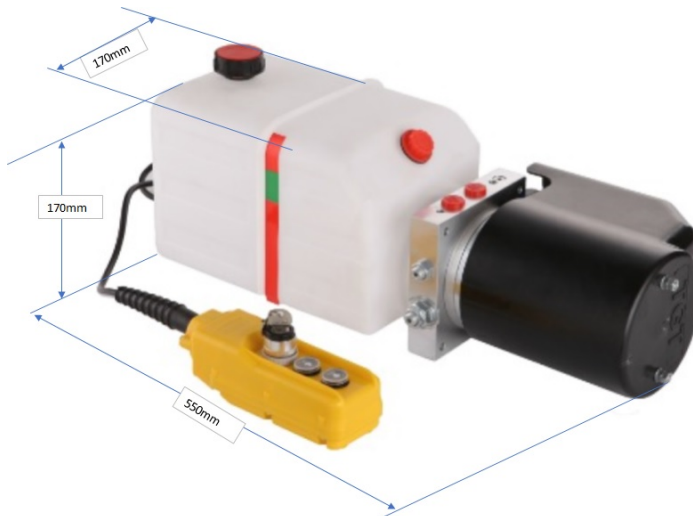

HYDRAULIC CIRCUIT


12VDC single acting hydraulic tipper powerpack,
litre reservoir c/w with 2 button pendent. 5l/min @ 160bar.
Hydraulic Power Unit Package to operate a single acting cylinder
cylinder on any trailer or tipper application complete with detachable two button pendent

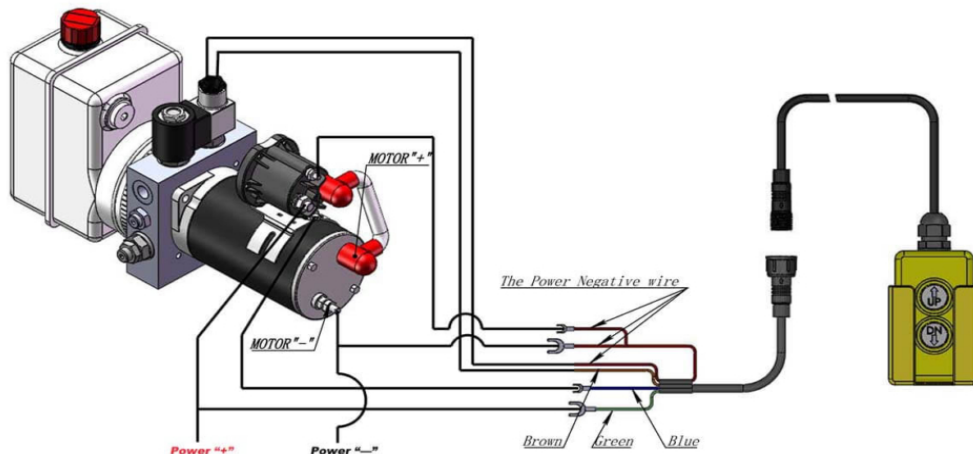

12vdc powerunit.
1,6cc/rev gear pump.
1.6kw 12vdc electric motor c/w relay and plastic motor cover.
4.5 or 8 Litre reservoir c/w drain plug.
Powerpack complete with suction strainer, return oil conveyor and filler breather.
Horizontal mounting
Max pressure 200 bar.
Relief valve set at 160 bar but adjustable from 40-200 bar as standard.
Max flow 5 l/min.
Adjustable flow control for cylinder decent control.
12vdc let down valve, relief and P line check.
Port size 3/8" BSP.
2 Button detachable pendent on a 4 metre lead.
(Cable remote or wireless remote optional)
Suitable for all single acting applications



Power pack package to operate a double acting cylinder on a variety of applications, complete with detachable two button pendent.

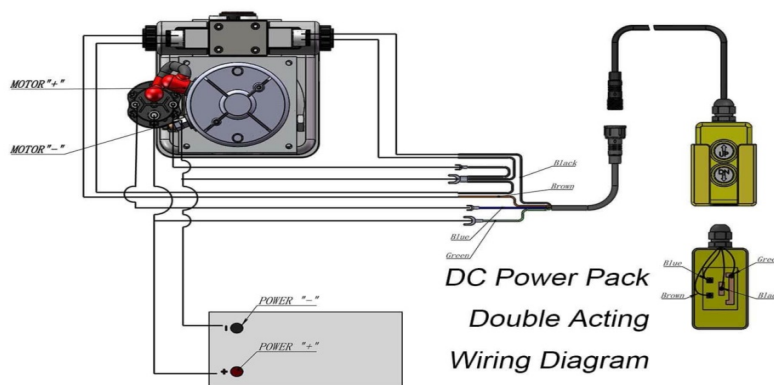

12VDC power pack
 1,6cc/rev gear pump
 1.6kw 12VDC electric motor c/w relay and plastic motor cover
 4.5 Litre or 8.0 Litre reservoir c/w drain plug
 Power pack complete with suction strainer, return oil conveyor and filler breather
 Horizontal mounting
 Max pressure 200 bar
 Relief valve set at 160 bar but adjustable from 40-200 bar as standard
 Max flow 5 l/min. Relief valve and P line check
 Port size 3/8" BSP
 2 Button detachable pendent on a 4 metre lead
 (cable remote or wireless remote optional)
 Suitable for all double acting applications