


How To Order

MKH	G1"1/2	1	1	1	2
(1)	(2)	(3)	(4)	(5)	(6)

- | | | |
|-----|-------------------------------|---|
| (1) | Model: MKH = 2 way ball valve | |
| (2) | Thread size: e.g. G"1/2 | |
| (3) | Block & connection material: | 1 = Carbon steel
2 = Stainless steel 304 |
| (4) | Ball & stem material: | 1 = Carbon steel
2 = Stainless steel 304 |
| (5) | Ball seat material: | 1 = POM 4 = PTFE |
| (6) | Connection & stem seal: | 2 = NBR 4 = FPM |

Dimensions

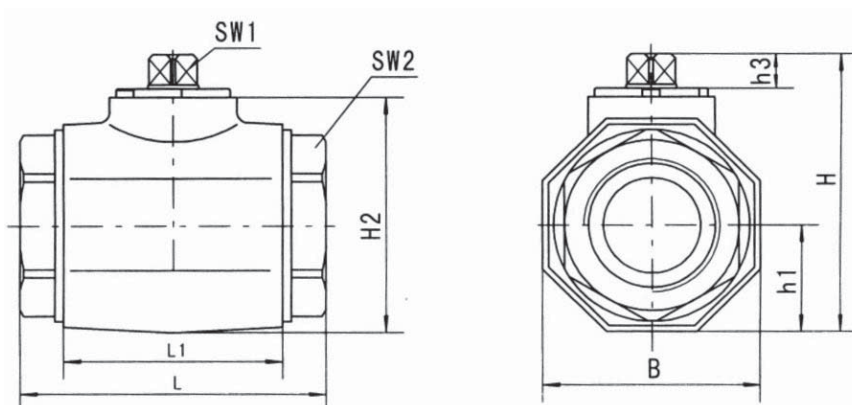

Order information

ISO 228 Female

Model	DN	PN	LW	d1	i	L	L1	B	H	h1	h2	h3	SW1	SW2
MKH-G1"1/4	32	315	30	G1"1/4	22	110	84	75	104,5	37,5	84	14	17	60
MKH-G1"1/2	40	315	38	G1"1/2	24	130	91	85	115,5	42,5	95	14	17	70
MKH-G2"	50	315	48	G2"	26	140	100	105	133	52,5	112,5	14	17	80

ANSI B1.20.1NPT Female

Model	DN	PN	LW	d1	i	L	L1	B	H	h1	h2	h3	SW1	SW2
MKH-1"1/4NPT	32	315	30	NPT1"1/4	22	110	84	75	104,5	37,5	84	14	17	60
MKH-1"1/2NPT	40	315	38	NPT1"1/2	24	130	91	85	115,5	42,5	95	14	17	70
MKH-2"NPT	50	315	48	NPT2"	26	140	100	105	133	52,5	112,5	14	17	80

DIN 2353 Light series

Model	DN	PN	LW	RA	d1	i	L	L1	B	H	h1	h2	h3	SW1	SW2
MKH-35LR	32	315	30	35	M45x2	16	141	84	75	104,5	37,5	84	14	17	60
MKH-42LR	40	315	38	42	M52x2	16	162	91	85	115,5	42,5	95	14	17	70

DIN 2353 Heavy series

Model	DN	PN	LW	RA	d1	i	L	L1	B	H	h1	h2	h3	SW1	SW2
MKH-38SR	32	315	30	38	M52x2	22	153	84	75	104,5	37,5	84	14	17	60