


Female connector L1-R

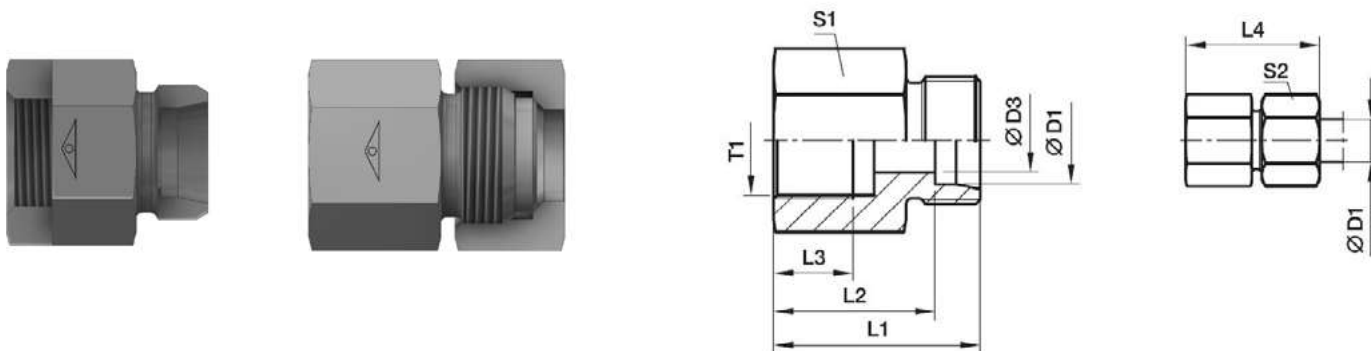

Series	Order code	D1	T1	D3	L1	L2	L3	L4	S1	S2	Weight (g)	PN (bar)	
												Z	SS
L	L1-6LR 1/8	06	G 1/8	4	26.0	19.0	8.0	34	14	14	18	315	315
	L1-8LR 1/4	08	G 1/4	6	31.0	24.0	12.0	39	09	17	39	315	315
	L1-8LR 3/8	08	G 3/8	6	32.0	45.0	12.0	40	24	17	61	315	315
	L1-8LR 1/2	08	G 1/2	6	36.0	29.0	14.0	44	27	17	80	315	315
	L1-10LR 1/4	10	G 1/4	8	32.0	25.0	12.0	40	19	19	40	315	315
	L1-10LR 3/8	10	G 3/8	8	33.0	26.0	12.0	41	24	19	63	315	315
	L1-10LR 1/2	10	G 1/2	8	37.0	30.0	14.0	45	27	19	81	315	315
	L1-12LR 3/8	12	G 3/8	10	33.0	26.0	12.0	41	24	22	64	315	315
	L1-12LR 1/2	12	G 1/2	10	37.0	30.0	14.0	45	27	22	83	315	315
	L1-15LR 1/2	15	G 1/2	12	38.0	31.0	14.0	46	27	27	87	315	315
	L1-18LR 1/2	18	G 1/2	15	38.0	30.5	14.0	47	27	32	89	315	315
	L1-22LR 3/4	22	G 3/4	19	43.0	35.5	16.0	52	36	36	173	160	160
	L1-28LR 1	28	G 1	24	45.5	38.0	18.0	55	41	41	211	160	160
	L1-35LR 1 1/4	35	G 1 1/4	30	54.5	41.0	20.0	63	55	50	469	160	160
	L1-42LR 1 1/2	42	G 1 1/2	36	63.5	52.5	22.0	65	60	60	540	160	160
S	L1-6SR 1/4	06	G 1/4	4	33.0	26.0	12.0	41	19	17	43	400	400
	L1-8SR 1/4	08	G 1/4	5	33.0	26.0	12.0	41	19	19	447	400	400
	L1-10SR 3/8	10	G 3/8	7	34.0	26.5	12.0	43	24	22	68	400	400
	L1-12SR 3/8	12	G 3/8	8	34.0	26.5	12.0	43	24	24	71	400	400
	L1-14SR 1/2	14	G 1/2	10	40.0	32.0	14.0	50	30	27	125	400	400
	L1-16SR 1/2	16	G 1/2	12	40.0	31.5	14.0	50	30	30	126	400	400
	L1-20SR 3/4	20	G 3/4	16	45.0	34.5	16.0	56	36	36	196	315	315
	L1-25SR 1	25	G 1	20	49.5	37.5	18.0	62	41	46	246	315	315
	L1-30SR 1 1/4	30	G 1 1/4	25	55.5	42.0	22.0	69	55	50	537	315	315
	L1-38SR 1 1/2	38	G 1 1/2	32	59.5	43.5	22.0	74	60	60	649	250	250