


Male stud connector G2-R-ED (L Series)

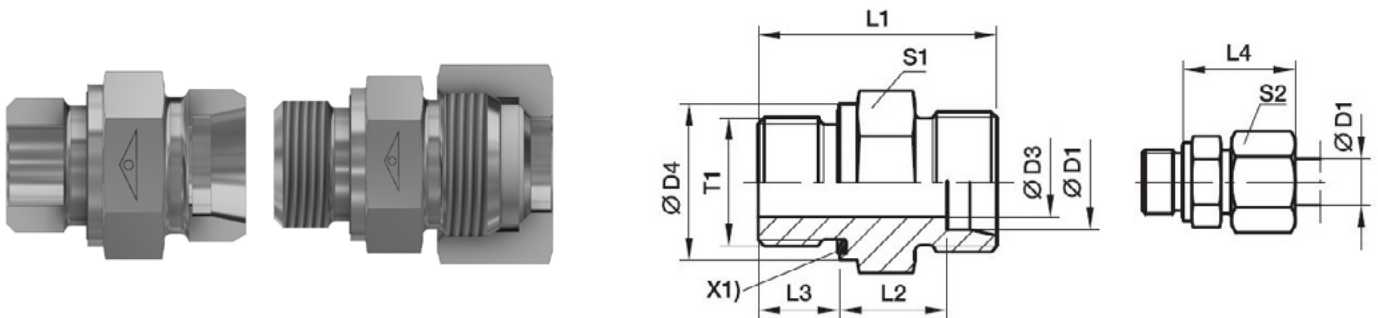

Series	Order code	D1	T	D3	D4	L1	L2	L3	L4	S1	S2	Weight (g)	PN (bar)	
													Z	SS
L	G2-6LR 1/8 ED	06	G 1/8 A	4	14	23.5	8.5	8.0	23	14	14	13	500	315
	G2-6LR 1/4 ED	06	G 1/4 A	4	19	29.0	10.0	12.0	25	19	14	28	500	315
	G2-6LR 3/8 ED	06	G 3/8 A	4	22	30.5	11.5	12.0	26	22	14	35	500	315
	G2-8LR 1/4 ED	08	G 1/4 A	6	19	29.0	10.0	12.0	25	19	17	27	500	315
	G2-8LR 1/8 ED	08	G 1/8 A	4	14	24.5	9.5	8.0	24	14	17	16	500	315
	G2-8LR 3/8 ED	08	G 3/8 A	6	22	30.5	11.5	12.0	26	22	17	45	420	315
	G2-8LR 1/2 ED	08	G 1/2 A	6	27	33.0	12.0	14.0	27	27	17	74	400	315
	G2-10LR 1/4 ED	10	G 1/4 A	6	19	30.0	11.0	12.0	26	19	19	29	500	315
	G2-10LR 3/8 ED	10	G 3/8 A	8	22	31.5	12.5	12.0	27	22	19	43	420	315
	G2-10LR 1/2 ED	10	G 1/2 A	8	27	34.0	13.0	14.0	28	27	19	71	400	315
	G2-12LR 1/4 ED	12	G 1/4 A	6	19	31.0	12.0	12.0	27	19	22	31	400	315
	G2-12LR 3/8 ED	12	G 3/8 A	9	22	31.5	12.5	12.0	27	22	22	41	420	315
	G2-12LR 1/2 ED	12	G 1/2 A	10	27	34.0	13.0	14.0	28	27	22	67	400	315
	G2-15LR 3/8 ED	15	G 3/8 A	9	22	32.0	13.5	12.0	29	24	27	54	400	315
	G2-15LR 1/2 ED	15	G 1/2 A	11	27	35.0	14.0	14.0	29	27	27	72	400	315
	G2-15LR 3/4 ED	15	G 3/4 A	12	32	38.0	15.0	16.0	30	32	27	116	250	160
	G2-18LR 1/2 ED	18	G 1/2 A	14	27	36.0	14.5	14.0	31	27	32	71	400	315
	G2-18LR 3/4 ED	18	G 3/4 A	15	32	38.0	14.5	16.0	31	32	32	110	250	160
	G2-22LR 1/2 ED	22	G 1/2 A	14	27	38.0	16.5	14.0	33	32	36	91	250	160
	G2-22LR 3/4 ED	22	G 3/4 A	18	32	40.0	16.5	16.0	33	32	36	102	250	160
	G2-28LR 3/4 ED	28	G 3/4 A	18	32	41.0	17.5	16.0	34	41	41	159	250	160
	G2-28LR 1 ED	28	G 1 A	23	40	43.0	17.5	18.0	34	41	41	170	250	160
	G2-35LR 1 ED	35	G 1 A	23	40	46.0	17.5	18.0	39	46	50	226	250	160
	G2-35LR 1 1/4 ED	35	G 1 1/4 A	30	50	48.0	17.5	20.0	39	50	50	272	250	260
	G2-42LR 1 1/2 ED	42	G 1 1/2 A	36	55	52.0	19.0	22.0	42	55	60	343	250	160