


Male stud elbow W4-RT

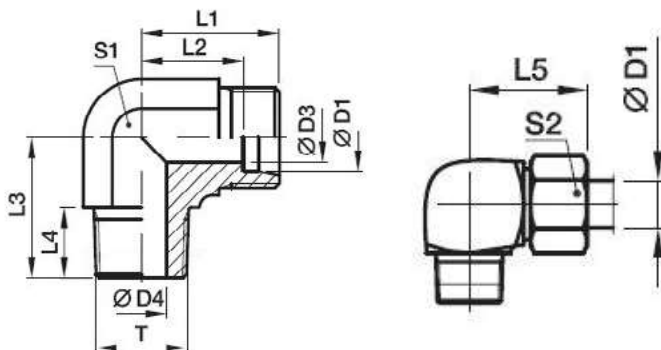

Series	Order code	D1	T	D3	D4	L1	L2	L3	L4	L5	S1	S2	Weight (g)	PN (bar)	
														Z	SS
L	W4-6LRT 1/8	06	R 1/8 tap.	4.0	4.0	19	12.0	20	8	27	12	14	30	315	315
	W4-6LRT 1/4	06	R 1/4 tap.	4.0	6.0	21	14.0	26	12	29	12	14	47	315	315
	W4-8LRT 1/8	08	R 1/4 tap.	6.0	6.0	21	14.0	26	12	29	12	17	46	315	315
	W4-8LRT 1/4	08	R 3/8 tap.	6.0	9.0	24	17.0	28	12	32	17	17	94	315	315
	W4-10LRT 1/4	10	R 1/4 tap.	8.0	7.0	22	15.0	27	12	30	14	19	61	315	315
	W4-10LRT 3/8	10	R 3/8 tap.	8.0	9.0	24	17.0	28	12	32	17	19	87	315	315
	W4-10LRT 1/2	10	R 1/2 tap.	10.0	11.0	28	21.0	34	14	36	19	19	88	315	315
	W4-12LRT 3/8	12	R 3/8 tap.	10.0	9.0	24	17.0	28	12	32	17	22	88	315	315
	W4-12LRT 1/4	12	R 1/4 tap.	10.0	7.0	24	17.0	27	12	32	17	22	80	315	315
	W4-12LRT 1/2	12	R 1/2 tap.	10.0	11.0	28	21.0	34	14	36	19	22	89	315	315
	W4-15LRT 1/2	15	R 1/2 tap.	12.0	11.0	28	21.0	34	14	36	19	27	94	315	315
	W4-18LRT 1/2	18	R 1/2 tap.	15.0	14.0	31	23.5	36	14	40	24	32	141	315	315
	W4-22LRT 3/4	22	R 3/4 tap.	19.0	16.0	35	27.5	42	19.5	44	27	36	167	160	160
	W4-28LRT 1	28	R 1 tap.	24.0	21.0	38	30.5	48	18	47	36	41	293	160	160
	W4-35LRT 1 1/4	35	R 1 1/4 tap.	30.0	28.0	45	34.5	54	20	56	41	50	437	160	160
	W4-42LRT 1 1/2	42	R 1 1/2 tap.	36.0	34.0	51	40	61	22	63	50	60	695	160	160
S	W4-6SRT 1/4	06	R 1/4 tap.	4.0	4.0	23	16.0	26	12	31	12	17	56	400	400
	W4-8SRT 1/4	08	R 1/4 tap.	5.0	5.0	24	17.0	27	12	32	14	19	73	400	400
	W4-10SRT 3/8	10	R 3/8 tap.	7.0	7.0	25	17.5	28	12	34	17	22	104	400	400
	W4-12SRT 3/8	12	R 3/8 tap.	8.0	8.0	29	21.5	28	12	35	17	24	126	400	400
	W4-14SRT 1/2	14	R 1/2 tap.	10.0	10.0	30	22.0	32	14	40	19	27	101	400	400
	W4-16SRT 1/2	16	R 1/2 tap.	12.0	12.0	33	24.5	32	14	43	24	30	150	400	400
	W4-20SRT 3/4	20	R 3/4 tap.	16.0	16.0	37	26.5	42	16	48	27	36	209	400	400
	W4-25SRT 1	25	R 1 tap.	20.0	20.0	42	30	48	18	54	36	46	376	400	400
	W4-30SRT 1 1/4	30	R 1 1/4 tap.	25.0	25.0	49	35.5	54	20	62	41	50	604	400	400
	W4-38SRT 1 1/2	38	R 1 1/2 tap.	32.0	32.0	57	41	61	22	72	50	60	937	315	315